

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization  
International Bureau



(43) International Publication Date  
4 April 2002 (04.04.2002)

PCT

(10) International Publication Number  
**WO 02/027063 A3**

(51) International Patent Classification<sup>7</sup>: **C23C 16/40**,  
16/44

47 Spring Street, Belmont, MA 02478 (US). **SUH, Seigi**  
[KR/US]; 61 Channing Road, Belmont, MA 02478 (US).

(21) International Application Number: PCT/US01/30507

(74) Agents: **SCOZZAFAVA, Mary, Rose** et al.; Hale and Dorr  
LLP, 60 State Street, Boston, MA 02109 (US).

(22) International Filing Date:

28 September 2001 (28.09.2001)

(81) Designated States (national): JP, KR, US.

(25) Filing Language:

English

(84) Designated States (regional): European patent (AT, BE,  
CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC,  
NL, PT, SE, TR).

(26) Publication Language:

English

(30) Priority Data:

60/236,283 28 September 2000 (28.09.2000) US  
60/253,917 29 November 2000 (29.11.2000) US

Published:

— with international search report  
— before the expiration of the time limit for amending the  
claims and to be republished in the event of receipt of  
amendments

(71) Applicant (for all designated States except US): **PRES-  
IDENT AND FELLOWS OF HARVARD COLLEGE**  
[US/US]; 17 Quincy Street, Cambridge, MA 02138 (US).


(88) Date of publication of the international search report:  
10 October 2002

(72) Inventors; and

(75) Inventors/Applicants (for US only): **GORDON, Roy,**  
G. [US/US]; 22 Highland Street, Cambridge, MA 02138  
(US). **BECKER, Jill** [CA/US]; 7 Cottage Street, Cam-  
bridge, MA 02139 (US). **HAUSMANN, Dennis** [US/US];

For two-letter codes and other abbreviations, refer to the "Guid-  
ance Notes on Codes and Abbreviations" appearing at the begin-  
ning of each regular issue of the PCT Gazette.

(54) Title: VAPOR DEPOSITION OF OXIDES, SILICATES AND PHOSPHATES

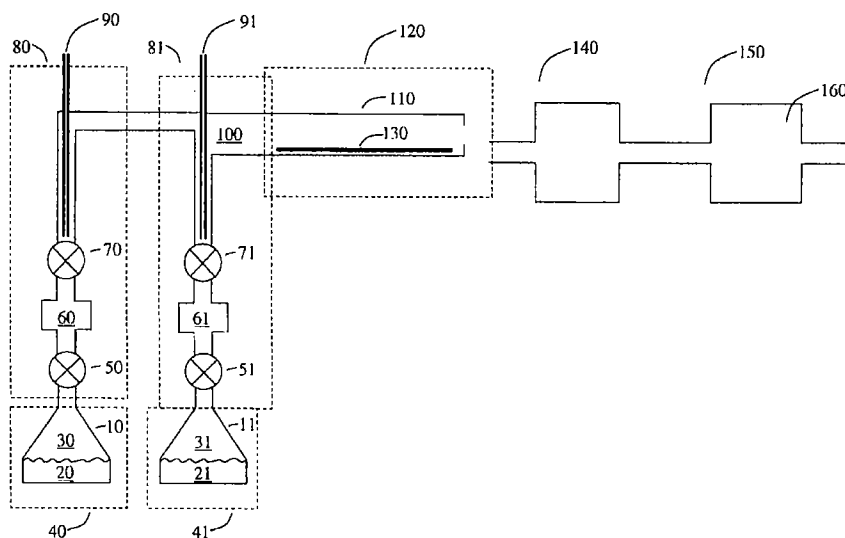

(57) Abstract: Metal silicates or phosphates are deposited on a heated substrate by the reaction of vapors of alkoxyasilanols or alkylphosphates along with reactive metal amides, alkyls or alkoxides. For example, vapors of tris-(ter-butoxy)silanol react with vapors of tetrakis(ethylmethyamido)hafnium to deposit hafnium silicate on surfaces heated to 300 °C. The product film has a very uniform stoichiometry throughout the reactor. Similarly, vapors of diisopropylphosphate react with vapors of lithium bis(ethylidimethylsilyl)amide to deposit lithium phosphate films on substrates heated to 250 °C. supplying the vapors in alternating pulse produces these same compositions with a very uniform distribution of thickness and excellent step coverage.

WO 02/027063 A3

## INTERNATIONAL SEARCH REPORT

International Application No

PCT/US 01/30507

## A. CLASSIFICATION OF SUBJECT MATTER

IPC 7 C23C16/40 C23C16/44

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 C23C

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

PAJ, WPI Data, EPO-Internal, INSPEC, IBM-TDB, COMPENDEX

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	EP 0 560 617 A (KAWASAKI STEEL CO) 15 September 1993 (1993-09-15) page 5, line 29 - line 41 page 20, line 1 - line 32 ---	1,3,4
X	DE 43 16 883 A (DENK MICHAEL DR) 24 November 1994 (1994-11-24) claims 2,37 ---	22-24
X	US 4 792 463 A (OKADA MASARU ET AL) 20 December 1988 (1988-12-20) example 4 --- -/--	1,10

☒ Further documents are listed in the continuation of box C.☒ Patent family members are listed in annex.

## \* Special categories of cited documents :

- \*A\* document defining the general state of the art which is not considered to be of particular relevance
- \*E\* earlier document but published on or after the international filing date
- \*L\* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- \*O\* document referring to an oral disclosure, use, exhibition or other means
- \*P\* document published prior to the international filing date but later than the priority date claimed

- \*T\* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- \*X\* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- \*Y\* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- \*Z\* document member of the same patent family

Date of the actual completion of the international search

9 August 2002

Date of mailing of the international search report

19.08.02

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,  
Fax: (+31-70) 340-3016

Authorized officer

Ekhult, H

## INTERNATIONAL SEARCH REPORT

International Application No

PCT/US 01/30507

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT		
Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	IKEDA Y ET AL: "OZONE/ORGANIC-SOURCE APCVD FOR ULSI REFLOW GLASS FILMS" NEC RESEARCH AND DEVELOPMENT, NIPPON ELECTRIC LTD. TOKYO, JP, no. 94, 1 July 1989 (1989-07-01), pages 1-7, XP000067542 ISSN: 0547-051X figure 1	1,11
X	WO 97 38355 A (MICRION CORP) 16 October 1997 (1997-10-16) page 3, line 4 - line 9	22
X	WO 99 29924 A (NESTE OYJ ;SUNTOLA TUOMO (FI); LESKELAE MARKKU (FI); RITALA MIKKO) 17 June 1999 (1999-06-17)	28
Y	page 5, line 4 - line 13	29,30
Y	US 5 389 401 A (GORDON ROY G) 14 February 1995 (1995-02-14) column 2, line 38 -column 4, line 13	29
Y	WO 99 29926 A (SIEMENS AG ;ADVANCED TECH MATERIALS (US)) 17 June 1999 (1999-06-17) page 10, line 3 -page 11, line 10 page 14, line 15 -page 16, line 2	30
A	COLTRIN M E ET AL: "Chemical kinetics in chemical vapor deposition: growth of silicon dioxide from tetraethoxysilane (TEOS)" THIN SOLID FILMS, ELSEVIER-SEQUOIA S.A. LAUSANNE, CH, vol. 365, no. 2, April 2000 (2000-04), pages 251-263, XP004197205 ISSN: 0040-6090 paragraphs '0004!', '0006!	1-11
A	PATENT ABSTRACTS OF JAPAN vol. 017, no. 227 (E-1360), 10 May 1993 (1993-05-10) & JP 04 359515 A (NEC CORP), 11 December 1992 (1992-12-11) abstract	2,4-11
A	WO 98 15669 A (FELTS JOHN T) 16 April 1998 (1998-04-16) page 18, line 1 - line 20	28-30

# INTERNATIONAL SEARCH REPORT

International application No.  
PCT/US 01/30507

## Box I Observations where certain claims were found unsearchable (Continuation of item 1 of first sheet)

This International Search Report has not been established in respect of certain claims under Article 17(2)(a) for the following reasons:

1. ☐ Claims Nos.:  
because they relate to subject matter not required to be searched by this Authority, namely:
2. ☐ Claims Nos.:  
because they relate to parts of the International Application that do not comply with the prescribed requirements to such an extent that no meaningful International Search can be carried out, specifically:
3. ☐ Claims Nos.:  
because they are dependent claims and are not drafted in accordance with the second and third sentences of Rule 6.4(a).

## Box II Observations where unity of invention is lacking (Continuation of item 2 of first sheet)

This International Searching Authority found multiple inventions in this International application, as follows:

see additional sheet

1. ☐ As all required additional search fees were timely paid by the applicant, this International Search Report covers all searchable claims.
2. ☐ As all searchable claims could be searched without effort justifying an additional fee, this Authority did not invite payment of any additional fee.
3. ☒ As only some of the required additional search fees were timely paid by the applicant, this International Search Report covers only those claims for which fees were paid, specifically claims Nos.:  
1-11, 22-24, 28-30
4. ☐ No required additional search fees were timely paid by the applicant. Consequently, this International Search Report is restricted to the invention first mentioned in the claims; it is covered by claims Nos.:

### Remark on Protest

- ☐ The additional search fees were accompanied by the applicant's protest.
- ☒ No protest accompanied the payment of additional search fees.

**FURTHER INFORMATION CONTINUED FROM PCT/ISA/ 210**

This International Searching Authority found multiple (groups of) inventions in this international application, as follows:

1. Claims: 1-11,22-24

CVD process using alkoxysilan(di)ol.

2. Claims: 12-21,25

CVD process using bis(alkyl)phosphates.

3. Claims: 26,27,31,32

CVD process using arene hydrates.

4. Claims: 28-30

CVD process using amides and alcohol or water.

## INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/US 01/30507

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
EP 0560617	A	15-09-1993	EP 0560617 A2	15-09-1993
			JP 6267939 A	22-09-1994
			US 5605867 A	25-02-1997
			JP 6069197 A	11-03-1994
			JP 6140390 A	20-05-1994
DE 4316883	A	24-11-1994	DE 4316883 A1	24-11-1994
			WO 9426752 A1	24-11-1994
			US 5728856 A	17-03-1998
US 4792463	A	20-12-1988	JP 1896389 C	23-01-1995
			JP 6008509 B	02-02-1994
			JP 62067175 A	26-03-1987
WO 9738355	A	16-10-1997	WO 9738355 A1	16-10-1997
WO 9929924	A	17-06-1999	FI 974472 A	10-06-1999
			AU 1489899 A	28-06-1999
			WO 9929924 A1	17-06-1999
			US 6416577 B1	09-07-2002
US 5389401	A	14-02-1995	NONE	
WO 9929926	A	17-06-1999	EP 0966553 A1	29-12-1999
			JP 2001511850 T	14-08-2001
			WO 9929926 A1	17-06-1999
			US 6177135 B1	23-01-2001
JP 04359515	A	11-12-1992	JP 2771347 B2	02-07-1998
WO 9815669	A	16-04-1998	US 6112695 A	05-09-2000
			AU 4498897 A	05-05-1998
			EP 0958400 A1	24-11-1999
			WO 9815669 A1	16-04-1998
			US 6180191 B1	30-01-2001

Coatings of metal silicates have many applications or potential applications. For example, silicates of zirconium, hafnium, yttrium or lanthanum are being considered as potential replacements for silicon dioxide in gate insulators in silicon semiconductor technology. See, for example, A. Kingon et al., *Nature*, volume 406, 5 pages 1032-1038 (2000). In *Science*, (volume 288, pages 319 to 321 (2000)), Ritala et al. report the use of the sequential ALD reaction of metal chlorides and silicon alkoxides to produce metal silicates, including zirconium silicate. However, this reaction deposits films containing residual chlorine, which can be deleterious to the properties of the film or to its adhesion to substrates or subsequent coatings. The 10 chlorine in the precursors can also corrode metal substrates or the apparatus used for the deposition. Thus it would be advantageous to have chlorine-free precursors for CVD or ALD of metal silicates or oxides.

ALD of silicon dioxide has been achieved by Klaus et al., U. S. Patent 6,090,442 (2000), but the deposition rate is very slow and the substrate temperature 15 is limited to values near room temperature.

Lithium phosphate is a material of current interest as a lithium ion conductor in lithium batteries. Currently there is no known process for CVD or ALD of lithium phosphate.

#### Summary of the Invention

20 A principal feature of the present invention includes volatile chemical precursors with reactivity adapted for CVD or ALD of metal silicates, phosphates or oxides.

An advantage of these chemical precursors is that they do not contain chlorine, and leave no chlorine residue during a process for the CVD or ALD of 25 metal silicates, phosphates or oxides.

Coatings of metal silicates have many applications or potential applications. For example, silicates of zirconium, hafnium, yttrium or lanthanum are being considered as potential replacements for silicon dioxide in gate insulators in silicon semiconductor technology. See, for example, A. Kingon et al., *Nature*, volume 406, 5 pages 1032-1038 (2000). In *Science*, (volume 288, pages 319 to 321 (2000)), Ritala et al. report the use of the sequential ALD reaction of metal chlorides and silicon alkoxides to produce metal silicates, including zirconium silicate. However, this reaction deposits films containing residual chlorine, which can be deleterious to the properties of the film or to its adhesion to substrates or subsequent coatings. The 10 chlorine in the precursors can also corrode metal substrates or the apparatus used for the deposition. Thus it would be advantageous to have chlorine-free precursors for CVD or ALD of metal silicates or oxides.

ALD of silicon dioxide has been achieved by Klaus et al., U. S. Patent 6,090,442 (2000), but the deposition rate is very slow and the substrate temperature 15 is limited to values near room temperature.

Lithium phosphate is a material of current interest as a lithium ion conductor in lithium batteries. Currently there is no known process for CVD or ALD of lithium phosphate.

#### Summary of the Invention

20 A principal feature of the present invention includes volatile chemical precursors with reactivity adapted for CVD or ALD of metal silicates, phosphates or oxides.

An advantage of these chemical precursors is that they do not contain chlorine, and leave no chlorine residue during a process for the CVD or ALD of 25 metal silicates, phosphates or oxides.



A related feature of the present invention is the deposition of metal silicates under conditions that produce a sharp interface between silicon substrates and the deposited metal silicate.

An advantage of the process is that it permits deposition of materials  
5 containing metal silicates or phosphates by a CVD process in which all the reactants may be mixed homogeneously before delivery to the heated surface of the substrate.

An additional advantage of the process is the vapor deposition of metal silicates or phosphates with relatively fixed ratio of metal to silicon over a range of conditions such as concentrations of reactants and position of the substrate inside the  
10 reactor.

Another advantage of the invention is its ability to make conformal coatings over substrates with narrow holes, trenches or other structures. This ability is commonly known as good step coverage.

Another feature of the present invention is the preparation of material  
15 comprising lithium phosphate.


An advantage of the invention is that the reactants are stable and relatively nonhazardous.

Another feature of the invention includes a chemical vapor deposition or atomic layer deposition process for metal oxides or mixtures of metal oxides.

20 A further feature of the invention includes process for atomic layer deposition of silicon dioxide.

One particular feature of the present invention includes a process for depositing oxides or silicates of zirconium, hafnium, yttrium and/or lanthanum having high dielectric constants of use as gate insulators or trench capacitors in  
25 microelectronic devices.


In at least some embodiments methyl groups are selected for each of the  $R^n$  in the general formula 1 given above one obtains a highly preferred compound tris(*tert*-butoxy)silanol 2, which may be written more compactly as  $(^t\text{BuO})_3\text{SiOH}$ .

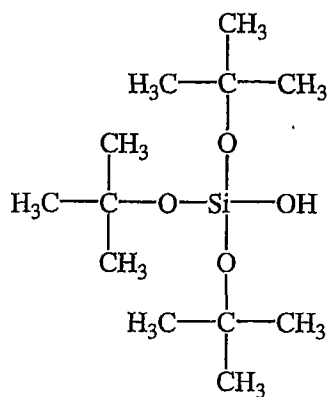

5

2

Another compound of the invention is tris(*tert*-pentyloxy)silanol, also known as tris(*tert*-amyloxy)silanol 3, which may be written more compactly as  $(^t\text{AmO})_3\text{SiOH}$ .

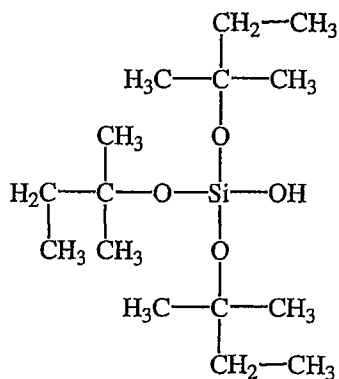


10

3

In at least some embodiments of the invention Di(alkoxy)silanediols such as  $(^t\text{BuO})_2\text{Si}(\text{OH})_2$  can also be used, although they are less stable than tris(alkoxy)silanol compounds in at least some applications. Di(alkoxy)silanediol compounds having the general formula 4 may be used according to the invention, where  $R^n$  represents hydrogen, alkyl groups, fluoroalkyl groups or alkyl groups substituted by other atoms or groups, preferably selected to enhance volatility and

stability, and may be the same or different for any  $R^n$ , and  $R^n$  is any of  $R^1$  through  $R^6$  may be the same or different.



5

4

In at least some embodiments, the groups  $R^1$  for the general formula 1 or  $R^1$ - $R^6$  for the general formula 4 may be selected from the group consisting of hydrogen, methyl, ethyl, n-propyl and isopropyl groups.

10 In the foregoing compounds, it is also understood that the alkyl groups  $R^1$  through  $R^9$  for general formula or  $R^1$  through  $R^6$  for general formula 4 may be a hydrocarbon having some degrees of unsaturation, e.g., aryl, alkenyl or alkynyl groups.

In at least some embodiments, metal compounds include those that react  
 15 readily with the slightly acidic protons in silanols. These acidic protons are the ones attached directly to oxygen in the silanol. Metal compounds that generally react with these acidic protons include most metal alkyls and other organometallic compounds, metal alkylamides, and some metal alkoxides. The reactivity of any particular compound can be established readily by mixing it with an alkoxysilanol  
 20 and analyzing the mixture for products by techniques such as nuclear magnetic resonance (NMR). We have found that compounds that are known to react with water also generally react with alkoxysilanol.

We have also discovered that the stoichiometry of the deposited metal

silicates can be controlled. The silicon/metal ratio may be decreased by replacing some or all of the silanol with water or an alcohol. Conversely, the silicon/metal ratio may be increased by replacing some or all of the metal source by a suitably reactive silicon-containing compound such as a silicon amide or a silylene. By these

5 methods the composition of the deposited material may be chosen to be any composition from pure metal oxide to pure silicon dioxide or any desired silicon/metal ratio in between. The stoichiometry may even be varied during the course of one deposition. For example, in the deposition of a gate insulator for a silicon semiconductor device, it may be desirable to begin the deposition with a


10 silicon-rich layer close to the silicon surface in order to improve the electrical properties of the interface, followed by a metal-rich layer with higher dielectric constant.

In another aspect of the invention, vapors of bis(alkyl)phosphates are reacted with the vapors of reactive metal compounds, such as metal alkylamides, metal

15 alkyls, metal cyclopentadienides or metal alkoxides, to form metal phosphates. The reaction may be carried out in a way that forms films.


In at least some embodiments of the invention, phosphorus-containing precursors include bis(alkyl)phosphates 5 in which  $R^n$ , represents hydrogen, alkyl groups, fluoroalkyl groups or alkyl groups, substituted with other atoms or groups

20 where  $R^n$  may be any of  $R^1$  through  $R^6$ . The  $R^n$  may be the same or different from each other.

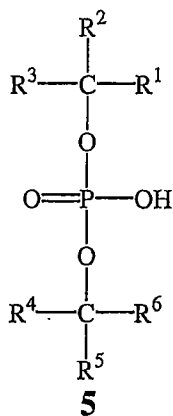

In at least one embodiment, the phosphorus precursor is

5 diisopropylphosphate, represented by the formula 6.

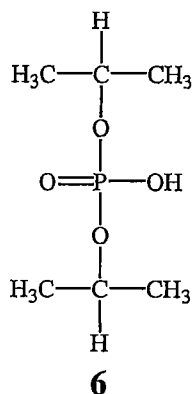


It is also possible to control the stoichiometry of the metal phosphates. The  
 10 phosphorus/metal ratio may be decreased by replacing some or all of the  
 bis(alkyl)phosphate with water or an alcohol. Conversely, the phosphorus/metal  
 ratio may be increased by replacing some or all of the metal source by a suitably  
 reactive phosphorus source. By these methods, the composition of the deposited  
 material may be varied from pure metal oxide to pure phosphorus oxide or any  
 15 desired phosphorus/metal ratio.

In at least some embodiments, the groups  $R^1$ - $R^6$  for the general formula 5 may  
 be selected from the group consisting of hydrogen, methyl, ethyl, n-propyl or  
 isopropyl groups. In the foregoing compounds, it is also understood that the alkyl

groups R<sup>1</sup> through R<sup>9</sup> for general formula 1 or R<sup>1</sup> through R<sup>6</sup> for general formula 4 may be a hydrocarbon having some degrees of unsaturation, e.g., aryl, alkenyl or alkynyl groups.

In another aspect of the invention, a process for preparing a material comprising silicon includes exposing a substrate to one or more vapors chosen from the group consisting of alkoxyasilanols, alkoxyasilanediols and silylenes. In at least some embodiments, the silylene is the compound described by the formula



where R is an alkyl group, or R is *tert*-butyl.

In one aspect of the invention, a process for forming a material including phosphorus includes exposing a substrate to one or more vapors chosen from the group consisting of bis(alkyl)phosphates, phosphorus(III) oxide and white phosphorus.

In another aspect of the invention, a process is provided for preparing oxygen-containing materials including exposing a substrate to one or more vapors chosen from the group consisting of arene hydrates, such as benzene hydrate, naphthalene hydrate, or a substituted benzene hydrate or a substituted naphthalene hydrate..

In another aspect of the invention, a process for forming a metal oxide is provided including exposing a heated surface alternately to the vapor of one or more metal amides and then to the vapors of water or an alcohol.

In at least some embodiments, the alcohol is an arene hydrate, or in at least

some embodiments, the metal amide or amides are chosen from Table 1.

In another aspect of the invention, a process for forming material including oxygen and one or more metals is provided by exposing a surface alternately to the vapor of one or more organometallic compounds and to the vapor of an arene

5 hydrate.

In at least one embodiment, the organometallic compounds are chosen from Table 2.

### Brief Description of the Drawings

Various objects, features, and advantages of the present invention can be  
10 more fully appreciated with reference to the following detailed description of the invention when considered in connection with the following drawings. The drawings are presented for the purpose of illustration only are not intended to be limiting of the invention, in which:

FIG. 1 is a cross-sectional illustration of an atomic deposition layer apparatus  
15 used in the practice of at least one embodiment of the invention;

FIG. 2 is a cross-sectional illustration of an atomic deposition layer apparatus used in the practice of at least one embodiment of the invention; and

FIG. 3 is a cross-sectional scanning electron micrograph of holes in a silicon wafer uniformly coated with hafnium dioxide using one embodiment of the  
20 invention.

### Detailed Description of the Invention

#### 1. Metal Silicates and Silicon Dioxide.

The present invention provides a method for preparing metal silicates of varying metal and silicon content. The method involves the reaction of a vapor of  
25 an alkoxysilanol or alkoxysilanediol with a vapor of one or more metal or metalloid compounds. The compound may be formed as a powder or as a film on a substrate, and in some embodiments, on a heated substrate. The compound may be formed on

some embodiments, the metal amide or amides are chosen from Table 1.

In another aspect of the invention, a process for forming material including oxygen and one or more metals is provided by exposing a surface alternately to the vapor of one or more organometallic compounds and to the vapor of an arene

5 hydrate.

In at least one embodiment, the organometallic compounds are chosen from Table 2.

### Brief Description of the Drawings

Various objects, features, and advantages of the present invention can be  
10 more fully appreciated with reference to the following detailed description of the invention when considered in connection with the following drawings. The drawings are presented for the purpose of illustration only are not intended to be limiting of the invention, in which:

FIG. 1 is a cross-sectional illustration of an atomic deposition layer apparatus  
15 used in the practice of at least one embodiment of the invention;

FIG. 2 is a cross-sectional illustration of an atomic deposition layer apparatus used in the practice of at least one embodiment of the invention; and

FIG. 3 is a cross-sectional scanning electron micrograph of holes in a silicon wafer uniformly coated with hafnium dioxide using one embodiment of the  
20 invention.

### Detailed Description of the Invention

#### 1. Metal Silicates and Silicon Dioxide.

The present invention provides a method for preparing metal silicates of varying metal and silicon content. The method involves the reaction of a vapor of  
25 an alkoxysilanol or alkoxysilanediol with a vapor of one or more metal or metalloid compounds. The compound may be formed as a powder or as a film on a substrate, and in some embodiments, on a heated substrate. The compound may be formed on




of the neat liquid. It has a vapor pressure of about 2 Torr at 96 °C. It is commercially available from Aldrich Chemical Company.

Silanols and silanediols may be reacted with a metal source to obtain a metal silicate. The metal source may contain one or more metals and the resultant metal silicate may contain one or more metals. In at least some embodiments, metal compounds include those that react readily with the slightly acidic protons in silanols. These acidic protons are the ones attached directly to oxygen in the silanol. Metal compounds that generally react with these acidic protons include most metal alkyls and other organometallic compounds, metal alkylamides, and some metal alkoxides. The reactivity of any particular compound can be established readily by mixing it with an alkoxysilanol and analyzing the mixture for products by techniques such as nuclear magnetic resonance (NMR). We have found that compounds that are known to react with water also generally react with alkoxysilanols.

The reaction is carried out in the vapor state and may be carried out using CVD or ALD techniques. As is discussed in greater detail below, ALD provides control over the deposition process and is suitable for use in a wide range of reaction conditions and reactant reactivity.

The silicon/metal ratio may be increased by replacing some or all of the metal precursor by a suitably reactive silicon compound. Silicon halides such as silicon tetrachloride,  $\text{SiCl}_4$ , may be used to increase the silicon content, but they may leave chloride as an impurity in the product, and their reactions may be slower than desired. Silicon amides such as tetraisocyanatosilane, tetrakis(dimethylamido)silane or tris(dimethylamido)silane avoid the halogen contamination. However, their deposition rates may also be slower than

desired. Silylenes are more rapidly reactive. For example, the thermally stable silylene 7



where R is an alkyl group or, in at least some embodiments, is *tert*-butyl, can be used as a rapidly reacting silicon source in place of part or all of the metal source, in order to increase the silicon/metal ratio.


In at least some embodiments, pure silicon dioxide may be prepared. In an ALD system, a pulse of silylene is followed by a pulse of oxygen gas, in order to fully oxidize the silylene after it has reacted with the surface. Pure silicon dioxide can be deposited rapidly by repeating the pulse sequence of silylene and oxygen.

## 2. Metal Phosphate and Phosphorus Oxide.

The present invention provides a method for preparing metal phosphates of varying metal and phosphorus content. The method involves the reaction of a vapor of an bis(alkyl)phosphate with a vapor of one or more metal or metalloid compounds. The compound may be formed as a powder or as a film on a substrate, and in some embodiments, on a heated substrate. The compound may be formed on a substrate by mixing the vapors of the bis(alkyl)phosphate and the metal or metalloid compound prior to deposition on a substrate. In at least some embodiments, a substrate is alternately exposed to a bis(alkyl)phosphate vapor and a vapor of one or more of a metal or metalloid compound.




Bis(alkyl) phosphate reactants are commercially available or may be prepared using conventional or known techniques. Phosphorus precursor, diethylphosphate,

is commercially available from a number of chemical companies, including Fisher Scientific (Pittsburgh, PA) and Pfaltz and Bauer (Waterbury, CT). Diethylphosphate may be prepared by the air oxidation of phosphinic acid in ethanol, catalyzed by copper chloride:





See, Y. Okamoto, T. Kusano and S. Takamuku, *Phosphorus, Sulfur and Silicon*, volume 55, pages 195-200 (1991).

An alternative reaction sequence is shown for diisopropylphosphate and may be used for other precursor compounds by appropriate substitutions for isopropanol.





See, McIvor et al., *Canadian J. Chemistry*, volume 34, pages 1825 and 1827.

Diisopropylphosphate may also be prepared by first forming its potassium salt by the following two reactions:




See, A. Zwierak and M. Kluba, *Tetrahedron*, volume 27, pages 3163 to 3170 (1971).

The analogous sodium salt may be prepared by the following two reactions:



The precursor diisopropylphosphate may then be liberated from its alkali salt by reaction with hydrochloric acid:



25 The above bis(alkyl)phosphates react with a wide range of metal compounds

to form metal phosphates. Metal compounds that generally react with the acid phosphate protons include most metal alkyls and other organometallic compounds, metal alkylamides, and some metal alkoxides. The reactivity of any particular compound can be established readily by mixing it with a bis(alkyl)phosphate and  
5 analyzing the mixture for products by techniques such as nuclear magnetic resonance (NMR).

The reaction is carried out in the vapor state and may be carried out using CVD or ALD techniques. As is discussed in greater detail below, ALD provides control over the deposition process and is suitable for use in a wide range of reaction  
10 conditions and reactant reactivity.

The phosphorus/metal ratio may be increased by replacing some or all of the metal precursor by a suitably reactive phosphorus compound. Phosphorus halides such as phosphorus trichloride,  $\text{PCl}_3$ , phosphorus pentachloride,  $\text{PCl}_5$ , or phosphorus oxychloride,  $\text{POCl}_3$ , may be used, but some halogen impurity may be included in the  
15 film. Phosphorus alkylamides such as hexamethylphosphorus triamide,  $(\text{Me}_2\text{N})_3\text{P}$ , hexamethylphosphorimidic triamide,  $(\text{Me}_2\text{N})_3\text{P}=\text{NH}$ , or hexamethylphosphoramidate,  $(\text{Me}_2\text{N})_3\text{PO}$ , avoid the halogen contamination, but their reactions may be slow.

White phosphorus,  $\text{P}_4$ , and phosphorus(III) oxide,  $\text{P}_4\text{O}_6$ , are more quickly reactive and can be used to increase the phosphorus/metal ratio in an ALD process. Doses of  
20 white phosphorus or phosphorus(III) oxide generally are followed by a pulse of oxygen in order to form fully oxidized films.

The phosphorus/metal ratio of material made by ALD may be decreased by replacing some of the phosphorus doses by doses of water or alcohol.

### 3. Metal Amides, Metal Alkyls and Metal Alkoxides.

25 In at least some embodiments, metal or metalloid amides are useful in the

practice of this invention. Some examples are given in Table 1, as well as a commercial source and/or literature references for their synthesis. The metalloids referred to in Table 1 are boron, silicon and arsenic.

Table 1. Some Volatile Metal or Metalloid Amides

Compound	Melt. Pt. °C	Vapor Press. °C/Torr	Reference and/or commercial source
Al(N(SiMe <sub>3</sub> ) <sub>2</sub> ) <sub>3</sub>	188		Wannagat, J. Organomet. Chem. <b>33</b> , 1 (1971)
Al <sub>2</sub> (NEt <sub>2</sub> ) <sub>6</sub>	liquid		Barry & Gordon, 2000
Al <sub>2</sub> (NEtMe) <sub>6</sub>	liquid	100/0.25	Barry & Gordon, 2000
Al(N <sup>i</sup> Pr <sub>2</sub> ) <sub>3</sub>	56-59		Brothers, Organometallics <b>13</b> , 2792 (1994)
Al <sub>2</sub> (NMe <sub>2</sub> ) <sub>6</sub>	88-89	90/0.1	Ruff, JACS <b>83</b> , 2835 (1961)
Al(N(Et)CH <sub>2</sub> CH <sub>2</sub> NMe <sub>2</sub> )(NMe <sub>2</sub> ) <sub>2</sub>	liquid	65-70/0.3	Barry, Gordon & Wagner, Mat. Res. Soc. Symp. Proc. <b>606</b> , 83-89 (2000)
As(NMe <sub>2</sub> ) <sub>3</sub>	-53	55/10	Cowley, JACS <b>95</b> , 6505 (1973)
As(N(Me)(SiMe <sub>3</sub> )) <sub>3</sub>	11-13	67-70/0.1	Birkofer & Ritter, Chem. Ber. <b>93</b> , 424 (1960)
B(NMe <sub>2</sub> ) <sub>3</sub>	-10	39/10	Abel et al., J. Chem. Soc. <b>1964</b> , 5584
B(NEt <sub>2</sub> ) <sub>3</sub>		95/11	Abel & Armitage J. Organomet. Chem. <b>5</b> , 326 (1966)
Ba(N(SiMe <sub>3</sub> ) <sub>2</sub> ) <sub>2</sub>	>150		Westerhauser, Inorg. Chem. <b>30</b> , 96 (1991)
Be(NMe <sub>2</sub> ) <sub>2</sub>	88-90	175/760	Anderson, JACS <b>74</b> , 1421 (1952)
Be(N(SiMe <sub>3</sub> ) <sub>2</sub> ) <sub>2</sub>	-5, liquid	110/3	Clark & Haaland, Chem. Commun., <b>1969</b> , 912
Be(TMPD) <sub>2</sub>	-10, liquid	106/0.001	Noeth & Schlosser, Inorg. Chem. <b>22</b> , 2700 (1983)
Bi(N(SiMe <sub>3</sub> ) <sub>2</sub> ) <sub>3</sub>	90		Lappert, J. Chem. Soc., Dalton, 2428(1980)
Bi(N(Me)(SiMe <sub>3</sub> )) <sub>3</sub>		90-92/0.1	Birkofer & Ritter, Chem. Ber. <b>93</b> , 424 (1960)
Ca(N(SiMe <sub>3</sub> ) <sub>2</sub> ) <sub>2</sub>	>120		Lappert, J. Chem. Soc., Chem. Comm., 1141(1990)
Cd(N(SiMe <sub>3</sub> ) <sub>2</sub> ) <sub>2</sub>	liquid		Burger, Wannagat, J. Organomet. Chem. <b>3</b> , 11(1965)
Cd(N <sup>i</sup> BuSiMe <sub>3</sub> ) <sub>2</sub>			Fisher & Alyea, Polyhedron <b>3</b> , 509 (1984)
Cd(TMPD) <sub>2</sub>			Fisher & Alyea, Polyhedron <b>3</b> , 509 (1984)
Ce(N(SiMe <sub>3</sub> ) <sub>2</sub> ) <sub>3</sub>		95-100/10 <sup>-4</sup>	Bradley, J. Chem. Soc., Dalton <b>1973</b> , 1021
Ce(N <sup>i</sup> Pr <sub>2</sub> ) <sub>3</sub>			Angew. Chem., Int. Ed. Engl. <b>36</b> , 2480(1997)
Co(N(SiBuMe <sub>2</sub> ) <sub>2</sub> ) <sub>2</sub>	liquid	146/0.085	Broomhall-Dillard & Gordon, 1999
Co(N(SiEtMe <sub>2</sub> ) <sub>2</sub> ) <sub>2</sub>	liquid	106/0.05	Broomhall-Dillard & Gordon, 1999
Co(N(SiMe <sub>3</sub> ) <sub>2</sub> ) <sub>2</sub>	>70	50-70/0.01	Chisholm, CVD <b>1</b> , 49 (1995)
Co(N(SiMe <sub>3</sub> ) <sub>2</sub> ) <sub>3</sub>	86-88		Power, JACS <b>11</b> , 8044 (1989)
Co(N(SiPrMe <sub>2</sub> ) <sub>2</sub> ) <sub>2</sub>	liquid	106/0.05	Broomhall-Dillard & Gordon, 1999
Cr(N(SiMe <sub>3</sub> ) <sub>2</sub> ) <sub>3</sub>	120	80/0.005	Bradley, J. Chem. Soc., Dalton <b>1972</b> , 1580
Cr(NEt <sub>2</sub> ) <sub>4</sub>	liquid	40-60/10 <sup>-3</sup>	Bradley, Proc. Chem. Soc., London <b>1963</b> , 305

$\text{Cr}(\text{N}^t\text{Pr}_2)_3$			Bradley & Chisholm, Chem. Comm. <b>1968</b> , 495
$\text{Cr}(\text{NMe}_2)_4$			Bradley, J. Chem. Soc. A, <b>1971</b> , 1433
$\text{Cu}_4(\text{N}(\text{SiMe}_3)_2)_4$	>180(d.)	160/0.1	Chisholm, CVD <b>1</b> , 49 (1995)
$\text{Er}(\text{N}(\text{SiMe}_3)_2)_3$	150-180		Wolczanski, Inorg. Chem. <b>31</b> , 1311 (1992)
$\text{Eu}(\text{N}(\text{SiMe}_3)_2)_3$	160-162	82-84/10 <sup>-4</sup>	Bradley, Chem. Comm. <b>1972</b> , 349
$\text{Fe}(\text{N}(\text{SiBuMe}_2)_2)_2$	liquid	130/0.2	Broomhall-Dillard & Gordon, 1999
$\text{Fe}(\text{N}(\text{SiMe}_3)_2)_2$	5, liquid	80-90/0.01	Chisholm, CVD <b>1</b> , 49 (1995)
$\text{Fe}(\text{N}(\text{SiMe}_3)_2)_3$	>80	80/0.005	Bradley, J. Chem. Soc., Dalton <b>1972</b> , 1580
$\text{Ga}(\text{NMe}_2)_3$	91	125/0.01	Chemat Catalog, Northridge, CA
$\text{Ga}(\text{NEt}_2)_3$			Chemat Catalog, Northridge, CA
$\text{Ga}(\text{N}(\text{SiMe}_3)_2)_3$	187		Wannagat, J. Organomet. Chem. <b>33</b> , 1 (1971)
$\text{Ga}(\text{N}^t\text{BuSiMe}_3)_3$	174-176		Cowley, Inorg. Chem. <b>33</b> , 3251 (1994)
$\text{Ga}(\text{TMPD})_3$	130-132		Cowley, Inorg. Chem. <b>33</b> , 3251 (1994)
$\text{Ga}(\text{N}(\text{Me})\text{CH}_2\text{CH}_2\text{NMe}_2)(\text{NMe}_2)_2$	liquid	48-55/0.18	Barry, Gordon & Wagner, Mat. Res. Soc. Symp. Proc. <b>606</b> , 83-89 (2000)
$\text{Gd}(\text{N}(\text{SiMe}_3)_2)_3$	160-163	80-83/10 <sup>-4</sup>	Bradley, Chem. Comm. <b>1972</b> , 349
$\text{Ge}(\text{N}(\text{SiMe}_3)_2)_2$	33	60/0.04	Chisholm, CVD <b>1</b> , 49 (1995)
$\text{Ge}(\text{NEt}_2)_4$	>109	109/2	Chemat Catalog, Northridge, CA
$\text{Ge}(\text{NMe}_2)_4$	14, liquid	203/760	Abel, J. Chem. Soc. <b>1961</b> , 4933; Chemat
$\text{Ge}(\text{N}^t\text{Bu}_2)_2$	2, liquid		Lappert, J. Chem. Soc., Chem. Com. <b>13</b> , 621 (1980)
$\text{Ge}(\text{N}^t\text{BuSiMe}_3)_2$	22	50/0.04	Lappert, J. Chem. Soc., Dalton Trans. <b>1977</b> , 2004
$\text{Ge}(\text{TMPD})_2$	60-62	70/0.02	Lappert, J. Chem. Soc., Chem. Com. <b>13</b> , 621 (1980)
$\text{Hf}(\text{NEt}_2)_4$	liquid	100/0.84	Bradley, J. Chem. Soc. A, <b>1969</b> , 980
$\text{Hf}(\text{NEtMe})_4$	liquid	83/0.05	Becker & Gordon, 2000; Aldrich
$\text{Hf}(\text{NMe}_2)_4$	30	70/0.73	Bradley, J. Chem. Soc. A, <b>1969</b> , 980
$\text{Hg}(\text{N}(\text{SiMe}_3)_2)_2$	liquid		Earborn, J. Chem. Soc., Chem. Comm., 1051 (1968)
$\text{Ho}(\text{N}(\text{SiMe}_3)_2)_3$	161-164	80-85/10 <sup>-4</sup>	Bradley, J. Chem. Soc., Dalton <b>1973</b> , 1021
$\text{In}(\text{N}(\text{SiMe}_3)_2)_3$	168		Wannagat, J. Organomet. Chem. <b>33</b> , 1 (1971)
$\text{In}(\text{TMPD})_3$			Frey et al., Z. Anorg. Allg. Chem. <b>622</b> , 1060 (1996)
$\text{KN}(\text{SiHexMe}_2)_2$	liquid		Broomhall-Dillard, Mater. Res. Soc. <b>606</b> , 139 (2000)
$\text{KN}(\text{SiMe}_3)_2$		90-100/10 <sup>-3</sup>	Fieser & Fieser <b>4</b> , 407
$\text{La}(\text{N}(\text{SiMe}_3)_2)_3$	145-149	100/10 <sup>-4</sup>	Bradley, J. Chem. Soc., Dalton <b>1973</b> , 1021
$\text{La}(\text{N}^t\text{BuSiMe}_3)_3$	146-147	90-95/10 <sup>-4</sup>	Becker, Suh & Gordon, 2000
$\text{La}(\text{N}^t\text{Pr}_2)_3$			Aspinall, J. Chem. Soc., Dalton <b>1993</b> , 993
$\text{La}(\text{TMPD})_3$	137-139	100/10 <sup>-4</sup>	Suh & Gordon, 2000
$\text{LiN}(\text{SiEtMe}_2)_2$	liquid	123/0.2	Broomhall-Dillard, Mater. Res. Soc. <b>606</b> , 139 (2000)
$\text{LiN}(\text{SiMe}_3)_2$	71-72	115/1	Inorg. Synth. <b>8</b> , 19 (1966)
$\text{Li}(\text{TMPD})$			Kopka, J. Org. Chem. <b>52</b> , 448 (1987)
$\text{Lu}(\text{N}(\text{SiMe}_3)_2)_3$	167-170	75-80/10 <sup>-4</sup>	Bradley, Chem. Comm. <b>1972</b> , 349
$\text{Mg}(\text{N}(\text{SiMe}_3)_2)_2$	123		Andersen, J. Chem. Soc., Dalton Trans. <b>1982</b> , 887

Mg(TMPD) <sub>2</sub>			Eaton, JACS <b>111</b> , 8016 (1989)
Mn(N(SiBuMe <sub>2</sub> ) <sub>2</sub> ) <sub>2</sub>	liquid	143/0.06	Broomhall-Dillard & Gordon, 1999
Mn(N(SiMe <sub>3</sub> ) <sub>2</sub> ) <sub>2</sub>	55-60	112-120/0.2	Bradley, Trans. Met. Chem. <b>3</b> , 253 (1978)
Mn(N(SiMe <sub>3</sub> ) <sub>2</sub> ) <sub>3</sub>	108-110		Power, JACS <b>11</b> , 8044 (1989)
Mo(N <sup>t</sup> BuSiMe <sub>3</sub> ) <sub>3</sub>			Laplaza, Cummins, JACS <b>118</b> , 8623 (1996)
Mo <sub>2</sub> (NEt <sub>2</sub> ) <sub>6</sub>			Chisholm, JACS <b>98</b> , 4469 (1976)
Mo <sub>2</sub> (NMe <sub>2</sub> ) <sub>6</sub>	solid	100/10 <sup>-4</sup>	Chisholm, JACS <b>98</b> , 4469 (1976)
Mo(NEt <sub>2</sub> ) <sub>4</sub>	liquid	80-110/10 <sup>-4</sup>	Bradley & Chisholm, J. Chem. Soc. A <b>1971</b> , 2741
Mo(NMe <sub>2</sub> ) <sub>4</sub>	solid	40-70/0.1	Bradley & Chisholm, J. Chem. Soc. A <b>1971</b> , 2741
NaN(Si <sup>n</sup> BuMe <sub>2</sub> ) <sub>2</sub>	liquid	189/0.08	Broomhall-Dillard, Mater. Res. Soc. <b>606</b> , 139 (2000)
NaN(SiMe <sub>3</sub> ) <sub>2</sub>	171-175	170/2	Chem. Ber. <b>94</b> , 1540 (1961)
Nb(N(SiMe <sub>3</sub> ) <sub>2</sub> ) <sub>3</sub>	solid		Broomhall-Dillard & Gordon, 1998
Nb(NEt <sub>2</sub> ) <sub>4</sub>	liquid		Bradley & Thomas, Can. J. Chem. <b>40</b> , 449 (1962)
Nb(NEt <sub>2</sub> ) <sub>5</sub>	>120	120/0.1	Bradley & Thomas, Can. J. Chem. <b>40</b> , 449 (1962)
Nb(NMe <sub>2</sub> ) <sub>5</sub>	>100	100/0.1	Bradley & Thomas, Can. J. Chem. <b>40</b> , 449 (1962)
Nd(N(SiMe <sub>3</sub> ) <sub>2</sub> ) <sub>3</sub>	161-164	85-90/10 <sup>-4</sup>	Bradley, J. Chem. Soc., Dalton <b>1973</b> , 1021
Nd(N <sup>i</sup> Pr) <sub>2</sub>			Bradley, Inorg.Nucl.Chem.Lett. <b>12</b> ,735(1976)
Ni(N(SiMe <sub>3</sub> ) <sub>2</sub> ) <sub>2</sub>	liquid	80/0.2	Burger & Wannagat, Mh. Chem. <b>95</b> , 1099 (1964)
Pb(N(SiMe <sub>3</sub> ) <sub>2</sub> ) <sub>2</sub>	39	60/0.04	Lappert, J. Chem. Soc., Chem. Com. <b>16</b> , 776 (1980)
Pb(N <sup>t</sup> BuSiMe <sub>3</sub> ) <sub>2</sub>	22	50/0.04	Lappert, J. Chem. Soc., Dalton Trans. <b>1977</b> , 2004
Pr(N(SiMe <sub>3</sub> ) <sub>2</sub> ) <sub>3</sub>	155-158	88-90/10 <sup>-4</sup>	Bradley, Chem. Comm. <b>1972</b> , 349
Sb(NMe <sub>2</sub> ) <sub>3</sub>	liquid	50/0.5	Cowley, JACS <b>95</b> , 6506 (1973)
Sb(N(Me)(SiMe <sub>3</sub> )) <sub>3</sub>	9-11	78-79/0.1	Birkofer & Ritter, Chem. Ber. <b>93</b> , 424 (1960)
Sc(N(SiMe <sub>3</sub> ) <sub>2</sub> ) <sub>3</sub>	172-174		Bradley, J. Chem. Soc., Dalton <b>1972</b> , 1580
SiH <sub>2</sub> (NMe <sub>2</sub> ) <sub>2</sub>	-104	93/760	Anderson et al., J. Chem. Soc. Dalton <b>12</b> , 3061 (1987)
SiH(NMe <sub>2</sub> ) <sub>3</sub>	-90	62/45	Gelest, Pfaltz & Bauer, Strem Catalogs
Si(NMe <sub>2</sub> ) <sub>4</sub>	1-2	196/760	Gordon, Hoffman & Riaz, Chem. Mater. <b>2</b> , 480 (1990)
Si(NHMe) <sub>4</sub>	37	45/0.05	Schmisbaur, Inorg. Chem. <b>37</b> , 510 (1998)
Si(NHn-Pr) <sub>4</sub>	liquid	75/0.05	Schmisbaur, Inorg. Chem. <b>37</b> , 510 (1998)
Si(NEt <sub>2</sub> ) <sub>4</sub>	3-4	74/19	Abel et al., J. Chem. Soc. <b>1965</b> , 62; Chemat
Si(NCO) <sub>4</sub>	25-26	40/1	Forbes & Anderson, JACS <b>62</b> , 761 (1940); Gelest, Petrarch, Showa-Denko
Si(NCO) <sub>4</sub>	25-26	40/1	Forbes & Anderson, JACS <b>62</b> , 761 (1940); Gelest, Petrarch, Showa-Denko
Sm(N(SiMe <sub>3</sub> ) <sub>2</sub> ) <sub>3</sub>	155-158	83-84/10 <sup>-4</sup>	Bradley, Chem. Comm. <b>1972</b> , 349
Sn(N(SiMe <sub>3</sub> ) <sub>2</sub> ) <sub>2</sub>	38	84/0.04	Chisholm, CVD <b>1</b> , 49 (1995)

$\text{Sn}(\text{NEt}_2)_4$	liquid	90/0.05	Jones & Lappert, J. Chem. Soc. <b>1965</b> , 1944
$\text{Sn}(\text{NMe}_2)_4$	liquid	51/0.15	Jones & Lappert, J. Chem. Soc. <b>1965</b> , 1944
$\text{Sn}(\text{N}^t\text{Bu}_2)_2$	47		Lappert, J. Chem. Soc., Chem. Com. <b>13</b> , 621 (1980)
$\text{Sn}(\text{N}^t\text{Bu}_2)_3$			Hudson, J. Chem. Soc. Dalton Trans. <b>1976</b> , 2369
$\text{Sn}(\text{N}^t\text{BuSiMe}_3)_2$	19, liquid	50/0.04	Lappert, J. Chem. Soc., Dalton Trans. <b>1977</b> , 2004
$\text{Sn}(\text{N}^t\text{BuSiMe}_3)_3$			Hudson, J. Chem. Soc. Dalton Trans. <b>1976</b> , 2369
$\text{Sn}(\text{TMPD})_2$			Lappert, J. Chem. Soc., Chem. Com. <b>16</b> , 776 (1980)
$\text{Sr}(\text{N}(\text{SiMe}_3)_2)_2$	164		Westerhauser, Inorg. Chem. <b>30</b> , 96 (1991)
$\text{Ta}(\text{NEt}_2)_4$		120/0.1	Bradley & Thomas, Can. J. Chem. <b>40</b> , 1355 (1962)
$\text{Ta}(\text{NMe}_2)_5$	>180	100/0.1	Bradley & Thomas, Can. J. Chem. <b>40</b> , 1355 (1962); Strem
$\text{Ta}(\text{N}^t\text{Bu})(\text{NEt}_2)_3$	liquid	90/0.1	Inorgtech
$\text{Ta}(\text{NEt})(\text{NEt}_2)_3$	liquid	120/0.1	Becke-Goehring & Wunsch, Chem. Ber. <b>93</b> , 326 (1960)
$\text{Tb}(\text{N}(\text{SiMe}_3)_2)_3$	162-165	$78-82/10^{-4}$	Wolczanski, Inorg. Chem. <b>31</b> , 1311 (1992)
$\text{Th}(\text{NEt}_2)_4$		$40-50/10^{-4}$	Reynolds & Edelstein, Inorg. Chem. <b>16</b> , 2822 (1977)
$\text{Th}(\text{NPr}_2)_4$	liquid	$60-70/10^{-4}$	Reynolds & Edelstein, Inorg. Chem. <b>16</b> , 2822 (1977)
$\text{Ti}(\text{N}(\text{SiMe}_3)_2)_3$	solid		Bradley, J. Chem. Soc., Dalton <b>1972</b> , 1580
$\text{Ti}(\text{NEt}_2)_4$	liquid	112/0.1	Bradley & Thomas, J. Chem. Soc. <b>1960</b> , 3857
$\text{Ti}(\text{N}^i\text{Pr}_2)_3$			Kruse, Inorg. Chem. <b>9</b> , 2615 (1970)
$\text{Ti}(\text{N}^i\text{Pr}_2)_4$	82-85	110/0.001	Froneman, P, S, Si, Relat. Elem. <b>47</b> , 273 (1990)
$\text{Ti}(\text{NMe}_2)_4$	liquid	50/0.05	Bradley & Thomas, J. Chem. Soc. <b>1960</b> , 3857
$\text{Tl}(\text{N}(\text{SiMe}_3)_2)_3$			Allman, J. Organomet. Chem. <b>162</b> , 283 (1978)
$\text{U}(\text{N}(\text{SiMe}_3)_2)_3$	137-140	$80-100/10^{-3}$	Andersen, Inorg. Chem. <b>18</b> , 1507 (1979)
$\text{U}(\text{NEt}_2)_4$		115-125/0.06	Jones, JACS <b>78</b> , 4285 (1956)
$\text{U}(\text{NPr}_2)_4$	liquid	$40-50/10^{-4}$	Reynolds & Edelstein, Inorg. Chem. <b>16</b> , 2822 (1977)
$\text{V}(\text{N}(\text{SiMe}_3)_2)_3$	>95	95/0.005	Bradley, J. Chem. Soc., Dalton <b>1972</b> , 1580
$\text{V}(\text{NEt}_2)_4$	liquid	90/0.001	Bradley, Chem. Commun. <b>1964</b> , 1064
$\text{V}(\text{NMe}_2)_4$	solid	50/0.001	Bradley, J. Chem. Soc. A, <b>1969</b> , 2330
$\text{V}(\text{O})(\text{NMe}_2)_3$	40	40/0.001	Davidson, Harris & Lappert, JCS Dalton <b>1976</b> , 2268
$\text{W}_2(\text{NEt}_2)_6$	solid	$140-170/10^{-4}$	Chisholm, JACS <b>97</b> , 5626 (1975); <b>98</b> , 4477 (1976)
$\text{W}_2(\text{NMeEt})_6$	solid	$100-130/10^{-4}$	Burger & Wannagat, Monatsh. <b>95</b> , 1099 (1964)
$\text{W}_2(\text{NMe}_2)_6$	solid	$100-120/10^{-4}$	Burger & Wannagat, Monatsh. <b>95</b> , 1099 (1964)
$\text{W}(\text{N}^t\text{Bu})_2(\text{NH}^t\text{Bu})_2$	89-90	$60-65/10^{-4}$	Nugent & Harlow, Inorg. Chem. <b>19</b> , 777 (1980)



$W(N^tBu)_2(NEtMe)_2$	liquid	87/0.1	Suh & Gordon, 2000
$W(N^tBu)_2(NMe_2)_2$	liquid	75/0.1	Suh & Gordon, 2000
$Y(N(SiMe_3)_2)_3$	180-184	100/10 <sup>-4</sup>	Bradley, J. Chem. Soc., Dalton <b>1973</b> , 1021; Alfa
$Y(N^iPr_2)_3$			Bradley, Inorg. Nucl. Chem. Lett. <b>12</b> , 735(1976)
$Y(N^tBuSiMe_3)_3$	158-160	90-95/10 <sup>-4</sup>	Suh & Gordon, 2000
$Y(TMPD)_3$	177-179	100/10 <sup>-4</sup>	Suh & Gordon, 2000
$Yb(N(SiMe_3)_2)_3$	162-165		Bradley, J. Chem. Soc., Dalton <b>1973</b> , 1021
$Yb(N^iPr_2)_3$			Bradley, Inorg. Nucl. Chem. Lett. <b>12</b> , 735 (1976)
$Zn(N(SiMe_3)_2)_2$	liquid	120/0.1	Inorg. Chem. <b>23</b> , 1972 (1984)
$Zn(N^tBu)_2$			Schumann, Z. Anorg. Allg. Chem. <b>623</b> , 1881 (1997)
$Zn(TMPD)_2$			Schumann, Z. Anorg. Allg. Chem. <b>623</b> , 1881 (1997)
$Zr(NEt_2)_4$	liquid	112/0.1	Bradley & Thomas, J. Chem. Soc. <b>1960</b> , 3857
$Zr(NEtMe)_4$	liquid	82/0.05	Becker & Gordon, 2000
$Zr(N^iPr_2)_4$	>120	120/0.001	Bradley, Inorg. Nucl. Chem. Lett. <b>11</b> , 155 (1975)
$Zr(NMe_2)_4$	70	65-80/0.1	Bradley & Thomas, J. Chem. Soc. <b>1960</b> , 3857

In Table 1, TMPD stands for 2,2,6,6-tetramethylpiperidide. Further examples may be found in the book Metal and Metalloid Amides, by M. F. Lappert, P. P. Power, A. R. Sanger and R. C. Srivastava, published in 1980 by Ellis Horwood Ltd., a division of John Wiley & Sons.

In at least some embodiments, metal alkyls are useful in the practice of this invention. Some examples are given in Table 2, as well as a commercial source or literature reference of their synthesis.

Table 2. Some Volatile Organometallic Compounds

Compound	Melt. Pt. °C	Vapor Press. °C/Torr	Sources
$AlMe_3$	15.4	20/8	Strem
$Ba(n-PrMe_4Cp)_2$	liquid		Strem
$Ba(^iPr_4Cp)_2$	149-150	90/0.01	J. Am. Chem. Soc. <b>113</b> , 4843-4851 (1991)
$Ba(Me_5Cp)_2$	265-268	140/0.01	J. Organomet. Chem. <b>325</b> , 31-37 (1987)
$BeEt_2$	12, liquid	110/15	Strem
$BiMe_3$	liquid	110/760	Pfaltz & Bauer, Organometallics

$\text{Ca}(\text{}^i\text{Pr}_4\text{Cp})_2$	196-200	190/0.01	J. Am. Chem. Soc. <b>113</b> , 4843-4851 (1991)
$\text{Ca}(\text{Me}_5\text{Cp})_2$	207-210	90/0.01	J. Organomet. Chem. <b>325</b> , 31-37 (1987)
$\text{CdMe}_2$	-4.5	105.5/760	Strem
$\text{CeCp}_3$	452	230/0.01	Strem
$\text{Ce}(\text{}^i\text{PrCp})_3$			Strem
$\text{Ce}(\text{Me}_4\text{Cp})_3$	solid		Aldrich
$\text{CoCp}_2$	176-180		Aldrich, Strem
$\text{CoCp}(\text{CO})_2$	liquid	37-38.5/2	Strem
$\text{Co}(\text{CO})_3\text{NO}$	liquid	50/760	Strem
$\text{CrCp}_2$	168-170		Aldrich, Strem
$\text{Cr}(\text{Me}_5\text{Cp})_2$	200		Strem
$\text{Cr}(\text{}^i\text{PrCp})_2$	solid		Strem
$\text{Cr}(\text{EtBz})_2$	liquid	140-160/1	Strem
$\text{CuCpPEt}_3$	solid	60/0.01	Strem
$\text{Er}(\text{Cp})_3$	285	200/0.01	Strem
$\text{Er}(\text{}^i\text{PrCp})_3$	63-65	222/10	Aldrich, Alfa, Strem
$\text{Er}(\text{BuCp})_3$	liquid	240/0.1	Aldrich, Alfa (pyrophoric)
$\text{Eu}(\text{Me}_4\text{Cp})_3$	solid		Aldrich
$\text{FeCp}(\text{Me}_2\text{NCH}_2\text{Cp})$	liquid	91-92/0.5	Strem
$\text{FeCp}(\text{}^i\text{BuCp})$	liquid	80/0.15	Strem
$\text{GaMe}_3$	-15, liquid	55.7/760	Strem
$\text{GdCp}_3$	295		Aldrich, Alfa, Strem
$\text{Gd}(\text{}^i\text{PrCp})_3$	liquid	200/0.01	Erbil, U.S. Patent 4,882,206 (1989)
$\text{InCp}_3$	solid	50/0.01	Strem
$\text{In}(\text{Me}_5\text{Cp})_3$			Strem
$\text{InMe}_3$	88		Strem
$\text{Ir}(\text{MeCp})(1,5\text{-COD})$			Strem
$\text{La}(\text{}^i\text{PrCp})_3$	liquid	180-195/0.01	Strem; Erbil, U.S. Patent 4,882,206 (1989)
$\text{LaCp}_3$	295 dec.	218/0.1	Aldrich, Alfa, Strem
$\text{LaCp}_3(\text{NCCH}_3)_2$	162		Inorganica Chim. Acta <b>100</b> , 183-199 (1985)
$\text{La}(\text{Me}_2\text{NC}_2\text{H}_4\text{Cp})_3$	75	160/0.001	J. Organomet. Chem. <b>462</b> , 163-174 (1993)
$\text{Mg}(\text{PrCp})_2$	liquid		Strem
$\text{Mg}(\text{EtCp})_2$	liquid		Aldrich, Strem
$\text{MgCp}_2$	180	160/0.1	Aldrich, Strem
$\text{MnCp}_2$	175		Aldrich, Strem
$\text{Mn}(\text{EtCp})_2$	liquid		Aldrich (pyrophoric)
$\text{Mn}(\text{Me}_5\text{Cp})_2$	292		Strem
$\text{Mo}(\text{EtBz})_2$	liquid		Strem
$\text{NdCp}_3$	417	220/0.01	Aldrich, Alfa, Strem
$\text{Nd}(\text{}^i\text{PrCp})_3$	solid		Aldrich, Alfa, Strem
$\text{Ni}(\text{PF}_3)_4$	liquid	70.7/760	Strem
$\text{PrCp}_3$	427	220/0.01	Aldrich, Alfa, Strem
$\text{Pr}(\text{}^i\text{PrCp})_3$	50-54		Aldrich, Alfa, Strem
$\text{SbEt}_3$		156/760	Strem
$\text{ScCp}_3$	240	200/0.05	Aldrich, Strem
$\text{SmCp}_3$	356	220/0.01	Strem
$\text{Sm}(\text{}^i\text{PrCp})_3$			Zh. Neorg. Khim. <b>27</b> , 2231-4 (1982)

Sr( <sup>i</sup> Pr <sub>4</sub> Cp) <sub>2</sub>	151-153		Chem. Rev. <b>93</b> , 1023-1-36 (1993)
Sr(Me <sub>5</sub> Cp) <sub>2</sub>	216-218		J. Organomet. Chem. <b>325</b> , 31-37 (1987)
Tb( <sup>i</sup> PrCp) <sub>3</sub>	solid		Aldrich, Strem
TmCp <sub>3</sub>	solid		Strem
Tm( <sup>i</sup> PrCp) <sub>3</sub>			MRS Symp. Proc. <b>301</b> , 3-13 (1993)
TiCp	solid	75/0.1	Strem
VCp <sub>2</sub>	165-167	200/0.1	Aldrich, Strem
V(EtCp) <sub>2</sub>	liquid		Aldrich
W( <sup>i</sup> PrCp) <sub>2</sub> H <sub>2</sub>	liquid	122-125/0.1	Aldrich, Strem
YCp <sub>3</sub>	296	200/2	Alfa, Strem
Y(MeCp) <sub>3</sub>			Strem
Y( <sup>n</sup> PrCp) <sub>3</sub>			Strem
Y(BuCp) <sub>3</sub>	liquid		Aldrich, Alfa, Strem
YbCp <sub>3</sub>	277	150(vac.)	Strem
Yb( <sup>i</sup> PrCp) <sub>3</sub>	47		Zh. Neorg. Khim. <b>27</b> , 2231-4 (1982)
ZnEt <sub>2</sub>	-28, liquid	124/760	Aldrich, Strem
ZnMe <sub>2</sub>	-42, liquid	46/760	Aldrich, Strem
ZrCp <sub>2</sub> Me <sub>2</sub>	170		Aldrich, Strem
Zr( <sup>i</sup> BuCp) <sub>2</sub> Me <sub>2</sub>			Strem

In Table 2, Cp is an abbreviation for cyclopentadienide, Me<sub>5</sub>Cp represents pentamethylcyclopentadienide, <sup>i</sup>PrCp represents isopropylcyclopentadienide, <sup>i</sup>PrMe<sub>4</sub>Cp stands for isopropyltetramethylcyclopentadienide, <sup>i</sup>Pr<sub>4</sub>Cp stands for tetraisopropylcyclopentadienide, EtCp stands for ethylcyclopentadienide, PrCp stands for propylcyclopentadienide, <sup>i</sup>PrCp stands for isopropylcyclopentadienide, BuCp stands for butylcyclopentadienide, Bz for benzenide, EtBz for a mixture of isomers of ethylbenzenide and 1,5-COD for 1,5-cyclooctadienide.

In at least some embodiments, metal or metalloid alkoxides can be used in the practice of this invention. Suitable compounds are listed in Table 3, as well as a commercial source or a literature reference of their synthesis.

Table 3. Some Volatile Metal or Metalloid Alkoxides

Compound	Melt. Pt.	Vapor Press.	Sources
	°C	°C/Torr	
Al <sub>2</sub> Et <sub>3</sub> (O-sec-Bu) <sub>3</sub>	liquid	190/0.1	Strem
B(OMe) <sub>3</sub>	-29, liquid	68.7/760	Aldrich, Rohm and Haas, Strem

Hf(O <sup>t</sup> Bu) <sub>4</sub>	liquid	90/5	Strem
Nb(OEt) <sub>5</sub>	6, liquid	156/0.05	Aldrich, Chemat, Strem
Ta(OEt) <sub>5</sub>	21	146/0.15	Aldrich, Chemat, Strem
Ti(O <sup>i</sup> Pr) <sub>4</sub>	20	58/1	Aldrich, Chemat, DuPont, Strem
Y(OCMe <sub>2</sub> CH <sub>2</sub> NMe <sub>2</sub> ) <sub>3</sub>	liquid	80/0.001	Herrmann, Inorg. Chem. <b>36</b> , 3545-3552(1997)
Zr(O <sup>t</sup> Bu) <sub>4</sub>	liquid	81/3, 90/5	Aldrich, Strem

Metal halides may also be used in the practice of this invention, but they have the disadvantages that they tend to leave some halide impurity in the film and cause corrosion of substrates or apparatus.


#### 5 4. Reactions with Water and Alcohols.

In at least some embodiments, part of the silanol or phosphate is replaced with water in order to deposit metal-rich silicates and phosphates. In a CVD reactor, water vapor tends to react very quickly with the vapors of the metal precursors near the vapor entrance to produce powder, rather than film on the substrate. In an ALD  
10 reactor such premature reactions are avoided because the reactants are introduced alternately into the reactor, so reactions near the entrance are prevented and reaction is confined to the surface of the substrate. However, water tends to adsorb strongly on surfaces, so it can take a long time to purge the ALD reactor between pulses of the reactants.

15 Alcohols such as isopropanol and *tert*-butanol can alleviate these problems with water, since the reactions of alcohols with metal compounds are slower, and the more volatile alcohols can be pumped more quickly from an ALD reactor. Alcohols such as isopropanol and *tert*-butanol are particularly appropriate for reactions involving thermally labile metal compounds. In some cases the substrate  
20 temperature is raised in order to decompose alkyl alcohols and thereby remove their carbon content from the film. A thermally labile metal compound may self-


decompose at higher substrate temperatures, so self-limiting ALD reactions cannot be achieved.

The arene hydrates are a class of alcohols that decompose at lower temperatures than ordinary alkyl alcohols, and thus can be used to provide carbon-free metal oxides at low enough temperatures to avoid self-decomposition of even thermally labile metal compounds. For example, benzene hydrate decomposes easily to water and benzene because of the aromatic stabilization of the benzene byproduct:

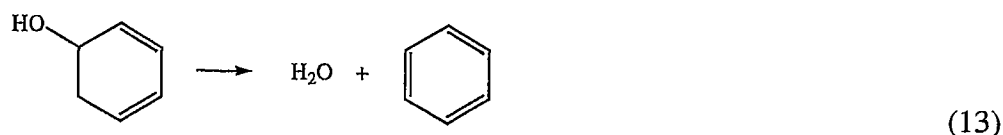


10

Other examples of useful arene hydrates are alkyl-substituted benzene hydrates such as the various isomers of toluene hydrate:

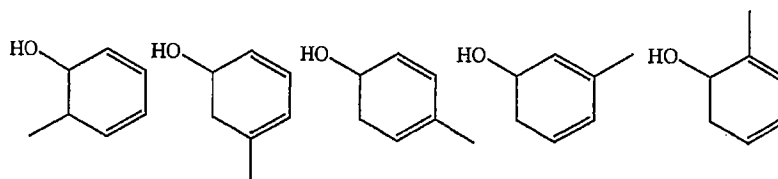

Other useful alcohols include the two naphthalene hydrates

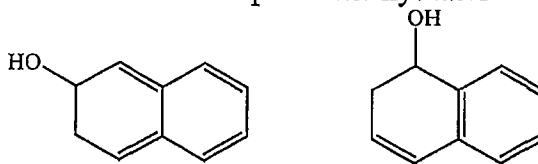

15

and alkyl-substituted naphthalene hydrates such as methyl naphthalene hydrate.

Thus arene alcohols may be used in the reaction of metal compounds at moderate deposition conditions. In particular, it can be used for the formation of metal oxides, or for the formation of metal silicates or metal phosphates when used in combination with the silicon and phosphorus precursors described herein.

In at least some embodiments of the present invention, a metal oxide is obtained by reaction of a metal amide with water. Suitable metal amides include

any of those listed in Table 1. Thus, by way of example, hafnium oxide was prepared by ALD using water vapor and tetrakis(dimethylamido)hafnium. This ALD reaction was found to be surprisingly efficient, in that almost all of the precursor that was delivered into the reaction chamber was deposited as film on the substrate and on the exposed wall of the chamber. It was also found to be surprisingly fast, going to completion (saturation of the surface reaction on a flat surface) with less than 50 Langmuirs of vapor flux (1 Langmuir is the flux delivered to a surface in one second by a partial pressure of  $10^{-6}$  Torr of the precursor). The byproducts of the reaction were found to consist of dimethylamine vapor, which does not etch the deposited hafnium oxide film. Most surprisingly, the use of tetrakis(alkylamido)hafnium precursors succeeded in the ALD of highly uniform films of hafnium oxide even in holes with very high aspect ratios (over 40). By way of contrast, the reactants commonly used in the prior art for ALD of hafnium oxide,  $\text{HfCl}_4$  and  $\text{Hf}(\text{O-}i\text{-tert-Bu})_4$ , have not succeeded in the uniform deposition of  $\text{HfO}_2$  in holes with such high aspect ratios.

#### 5. Vaporization of Reactants and Product Deposition.

Vapors of liquid precursors may be formed by conventional methods, including heating in a bubbler, in a thin-film evaporator, or by nebulization into a carrier gas preheated to about 100 to 250 °C. The nebulization may be carried out pneumatically or ultrasonically. Solid precursors may be dissolved in organic solvents, including hydrocarbons such as decane, dodecane, tetradecane, toluene, xylene and mesitylene, and with ethers, esters, ketones and chlorinated hydrocarbons. Solutions of liquid precursors generally have lower viscosities than the pure liquids, so that in some cases it may be preferable to nebulize and evaporate solutions rather than the pure liquids. The liquids or solutions can also be evaporated

with thin-film evaporators or by direct injection of the liquids into a heated zone.

Thin-film evaporators are made by Artisan Industries (Waltham, Massachusetts).

Commercial equipment for direct vaporization of liquids is made by MKS

Instruments (Andover, Massachusetts), ATMI, Inc. (Danbury, Connecticut),

- 5 Novellus Systems, Inc. (San Jose, California) and COVA Technologies (Colorado Springs, CO). Ultrasonic nebulizers are made by Sonotek Corporation (Milton, New York) and Cetac Technologies (Omaha, Nebraska).

The silicon precursors of the present invention may be reacted with metal or metalloid amides, such as those in Table 1, to form metal or metalloid silicates. The

- 10 silicon precursors of the present invention may be reacted with organometallic compounds, such as those in Table 2, to form metal silicates. The silicon precursors of the present invention may be reacted with metal or metalloid alkoxides, such as those in Table 3, to form metal or metalloid silicates. The silicon precursors of the present invention may also be reacted with other suitably reactive metal compounds
- 15 to form metal silicates. For example, tris(*tert*-butoxy)silanol may be reacted with tris(*tert*-butyl(trimethylsilyl)amido)yttrium (Table 1) to form yttrium silicate (Examples 5 and 6). Also, tris(*tert*-butoxy)silanol may be reacted with tris(*tert*-butyl(trimethylsilyl)amido)lanthanum (Table 1) to form lanthanum silicate (Examples 7 and 8). Metal oxides may be obtained by reaction of a suitable metal
- 20 and with water. Tris(bis(trimethylsilyl)amido)lanthanum reacts with water vapor to form a more lanthanum-rich silicate (Example 21). Lanthanum oxide may be deposited from silicon-free precursors such as tris(2,2,6,6-tetramethylpiperidido)lanthanum (Example 22).

- The phosphorus precursors of the present invention may be reacted with
- 25 suitably reactive metal compounds, such as those in the Tables, to form metal

phosphates. For example, diisopropylphosphate may be reacted with lithium bis(ethyldimethylsilyl)amide (Table 1) to provide a process for depositing lithium phosphate films that are lithium ion conductors, as is shown in Examples 9 and 10.

The process of the invention can be carried out in standard equipment well known in the art of chemical vapor deposition (CVD). The CVD apparatus brings the vapors of the reactants into contact with a heated substrate on which the material deposits. A CVD process can operate at a variety of pressures, including in particular normal atmospheric pressure, and also lower pressures. Commercial atmospheric pressure CVD furnaces are made in the USA by the Watkins-Johnson Company (Scotts Valley, California), BTU International (North Billerica, Massachusetts) and SierraTherm (Watsonville, California). Commercial atmospheric pressure CVD equipment for coating glass on the float production line is made in the USA by Pilkington North America (Toledo, Ohio), PPG Industries (Pittsburgh, Pennsylvania) and AFG Industries (Kingsport, Tennessee). Low-pressure CVD equipment is made by Applied Materials (Santa Clara, California), Spire Corporation (Bedford, Massachusetts), Materials Research Corporation (Gilbert, Arizona), Novellus Systems, Inc. (San Jose, California), Genus (Sunneyvale, California), Mattson Technology (Fremont, CA), Emcore Corporation (Somerset, New Jersey), NZ Applied Technologies (Woburn, Massachusetts), COVA Technologies (Colorado Springs, CO) and CVC Corporation (Freemont, California). Apparatus adapted to atomic layer deposition (ALD) is available from Genus (Sunneyvale, California) and ASM Microchemistry (Espoo, Finland).

The process of the invention may also be carried out using atomic layer deposition (ALD). ALD introduces a metered amount of a first reactant component into a deposition chamber having a substrate therein for layer deposition. A thin



layer of the first reactant is deposited on the substrate. After a preselected time period, a metered amount of a second reactant component is then introduced into the deposition chamber, which is deposited on and interacts with the already deposited layer of the first reactant component. Alternating layers of first and second reactant components are introduced into the deposition chamber and deposited on the substrate to form a layer of controlled composition and thickness. Alternation of deposition may be on the order of seconds to minutes and is selected to provide adequate time for the just introduced component to deposit on the substrate and for any excess vapor to be removed from the headspace above the substrate. It has been determined that the surface reactions are self-limiting so that a reproducible layer of predictable composition is deposited. Use of more than two reactant components is within the scope of the invention.

In at least some embodiments of the invention, automobile fuel injectors (Ford model CM-4722 F13Z-9F593-A) may be used to deliver pulses of the solutions of precursors into the nitrogen carrier gas. Solution is delivered each time a valve opens for about 50 milliseconds.

In another embodiment of the invention, 6-port sampling valves (Valco model EP4C6WEPH, Valco Instruments, Houston, TX) normally used for injecting samples into gas chromatographs may be used to deliver pulses of solutions into a suitable carrier gas. Each time that a valve is opened, solution flows into a tube in which solution is vaporized by heat from hot oil flowing over the outside of the tube. Carrier gas moves the vapor from the tube into the ALD reactor tube.

In at least some embodiments, a layer is deposited by ALD using an apparatus such as that illustrated in FIG. 1. According to at least some embodiments, measured doses of reactant vapor **30** are introduced into the heated

deposition chamber **110** by the use of a pair of air-actuated diaphragm valves, **50** and **70** (Titan II model made by Parker-Hannifin, Richmond CA). The valves are connected by a chamber **60** having a measured volume  $V$ , and this assembly is placed inside an oven **80** held at a controlled temperature  $T_2$ . The pressure of the reactant vapor **30** in the precursor reservoir **10** is equal to the equilibrium vapor pressure  $P_{eq}$  of the solid or liquid reactant **20** at a temperature  $T_1$  determined by the surrounding oven **40**. The temperature  $T_1$  is chosen to be high enough so that the precursor pressure  $P_{eq}$  is higher than the pressure  $P_{dep}$  in the deposition chamber. The temperature  $T_2$  is chosen to be higher than  $T_1$  so that only vapor and no condensed phase is present in the valves **50** and **70** or the chamber **60**. In the case of a gaseous reactant, its pressure can be set by a pressure regulator (not shown) that reduces its pressure from the pressure in the precursor gas cylinder **10**.

A similar arrangement is provided for each reactive precursor introduced into the deposition chamber **110**. Thus, a precursor reservoir **11** holds a solid or liquid reactant **21** having a vapor pressure **31** at a temperature  $T_1'$  maintained by surrounding oven **41**. Valves **51** and **71** are connected by a chamber **61** having a measured volume  $V'$  and this assembly is housed in oven **81** at temperature  $T_2'$ .

Carrier gas (such as nitrogen) flows at a controlled rate into inlet **90** in order to speed the flow of the reactants into the deposition chamber and the purging of reaction byproducts and un-reacted reactant vapor. A static mixer may be placed in the tubing **100** leading into the reactor, to provide a more uniform concentration of the precursor vapor in the carrier gas as it enters the deposition chamber **110** heated by furnace **120** and containing one or more substrates **130**. The reaction byproducts and un-reacted reactant vapors are removed by trap **140** before passing into a vacuum pump **150**. Carrier gas exits from exhaust **160**.

In operation, valve **70** is opened so that the pressure inside chamber **60** is reduced to a value  $P_{\text{dep}}$  close to that of the deposition chamber **110**. Then valve **70** is closed and valve **50** is opened to admit precursor vapor from precursor reservoir **10** into chamber **60**. Then valve **50** is closed so that the volume  $V$  of chamber **60** contains vapor of the precursor at a pressure  $P_{\text{eq}}$ . Finally, valve **70** is opened to admit most of the precursor vapor contained in chamber **60** into the deposition chamber. The number of moles,  $n$ , of precursor delivered by this cycle can be estimated by assuming that the vapor obeys the ideal gas law:

$$n = (P_{\text{eq}} - P_{\text{dep}})(V/RT_1) \quad (14)$$

where  $R$  is the gas constant. This expression also assumes that carrier gas from tube **90** does not enter chamber **60** through valve **70** during the brief time that it is open to release the precursor vapor. If mixing of carrier gas with the precursor vapor does occur during the time that valve **70** is open, then a larger dose of precursor vapor may be delivered, up to a maximum value

$$n = (P_{\text{eq}})(V/RT_1) \quad (15)$$

if all the residual precursor vapor in chamber **60** is displaced by carrier gas. For precursors with relatively high vapor pressure ( $P_{\text{eq}} \gg P_{\text{dep}}$ ), there is not much difference between these two estimates of the precursor dose.

This cycle of delivering precursor **20** is repeated if necessary until the required dose of precursor **20** has been delivered into reaction chamber. Normally, in an ALD process, the dose of precursor **20** delivered by this cycle (or several such cycles repeated to give a larger dose) is chosen to be large enough to cause the surface reactions to go to completion (also called "saturation").

Next a dose of vapor **31** from a second precursor **21** may be measured and delivered by a similar apparatus with components numbered similarly to the

apparatus for the first precursor **20**.

In the case of precursors with vapor pressure so low that  $P_{eq}$  is less than  $P_{dep}$ , this method will not deliver any precursor vapor into the deposition chamber. The vapor pressure can be increased by raising the temperature  $T_1$ , but in some cases a  
 5 higher temperature would result in thermal decomposition of the precursor. In such cases of thermally sensitive precursors with low vapor pressure, vapor may be delivered using the apparatus in FIG. 2. The chamber **220** is first pressurized with carrier gas delivered through tube **240** and valve **200** from a pressure controller (not shown). Valve **200** is then closed and valve **210** opened to allow the carrier gas to  
 10 pressurize precursor reservoir **220** to pressure  $P_{tot}$ . The mole fraction of precursor vapor in the vapor space **30** of reservoir **10** is then  $P_{eq}/P_{tot}$ . If  $P_{tot}$  is set to a pressure larger than the pressure  $P_{dep}$  in the deposition chamber, then the number of moles delivered in a dose can be estimated from the equation

$$n = (P_{eq}/P_{tot})(P_{tot} - P_{dep})(V/RT_1), \quad (16)$$

15 where  $V$  is the volume of the vapor space **30** in chamber **10**. This dose is delivered by opening valve **230**. If carrier gas from tube **90** enters the volume **30** during the time that the valve **230** is open, then a dose somewhat larger than this estimate may be delivered. By making the volume  $V$  large enough, a precursor dose that is certainly large enough to saturate the surface reaction may be delivered. If the vapor  
 20 pressure  $P_{eq}$  is so low that the required volume  $V$  would be impracticably large, then additional doses from volume  $V$  may be delivered before delivering a dose of the other reactant.

A similar apparatus is provided for each precursor reactant of the system. Thus, chamber **221** is first pressurized with carrier gas delivered through tube **241**  
 25 and valve **201** from a pressure controller (not shown). Valve **201** is then closed and

valve 211 is opened to allow the carrier gas to pressurize precursor reservoir 11 to pressure  $P_{\text{tot}}$ . This dose is delivered by opening valve 231. Carrier gas from tube 91 promotes transport of the metered dose to the deposition chamber.

In an isothermal deposition zone, material is generally deposited on all  
5 surfaces exposed to the precursor vapors, including substrates and the interior chamber walls. Thus it is appropriate to report the precursor doses used in terms of moles per unit area of the substrates and exposed chamber walls.

The liquids and solutions described herein may also be used as metal-  
containing precursors for other types of deposition processes, such as spray coating,  
10 spin coating or sol-gel formation of mixed metal oxides. The high solubility and miscibility of these precursors is an advantage in forming the required solutions.

The amides disclosed in these examples appeared to be non-pyrophoric by the methods published by the United States Department of Transportation. One test calls for placing about 5 milliliters of the material on an non-flammable porous  
15 solid, and observing that no spontaneous combustion occurs. Another test involves dropping 0.5 milliliters of the liquid or solution on a Whatman No. 3 filter paper, and observing that no flame or charring of the paper occurs.

The precursors generally react with moisture in the ambient air, and should be stored under an inert, dry atmosphere such as pure nitrogen gas.

20 The invention may be understood with reference to the following examples which are for the purpose of illustration only and which are not limiting of the invention, the full scope of which is set forth in the claims which follow.

Example 1. CVD of Zirconium Silicate. A solution (1 % by weight) of tris(*tert*-butoxy)silanol in mesitylene was pumped at a rate of 6 ml/hour into a 1/16" O.D. tee joint through which nitrogen gas flowed at 0.4 L/min. The resulting fog  
25

flowed into a tube heated to 250 °C. A solution (1 % by weight) of tetrakis(ethylmethyamido)zirconium in mesitylene was pumped at a rate of 12 ml/hour into another tee joint through which nitrogen gas flowed at 0.4 L/min. The resulting fog flowed into the same heated tube. The gas pressure was maintained at 5 Torr by a vacuum pump attached to the outlet of the glass tube by a liquid nitrogen trap. Substrates of silicon and glassy carbon placed inside the tube were coated with a film of zirconium silicate whose thickness varied along the length of the tube. Analysis of the film by Rutherford backscattering spectroscopy gave a composition  $\text{ZrSi}_2\text{O}_6$  for films deposited on glassy carbon. No carbon or nitrogen was detected in the film. The refractive indexes of films deposited on silicon were found to be about 1.6 by ellipsometry.

Example 2. ALD of Zirconium Silicate. Example 1 was repeated except that the precursors were injected in alternate pulses spaced 5 seconds apart, instead of continuously. A film of similar composition,  $\text{ZrSi}_2\text{O}_6$ , was deposited with uniform thickness along the whole length of the heated zone. The thickness was about 0.3 nm per cycle.

Example 3. CVD of Hafnium Silicate. Example 1 was repeated with tetrakis(ethylmethyamido)hafnium in place of tetrakis(ethylmethyamido)zirconium. Films of composition approximately  $\text{HfSi}_2\text{O}_6$  were formed. No carbon or nitrogen was detected in the film. The refractive indexes of films deposited on silicon were found to be about 1.6 by ellipsometry.

Example 4. ALD of Hafnium Silicate. Example 3 was repeated except that the precursors were injected in alternate pulses spaced 5 seconds apart, instead of continuously. A film of similar composition,  $\text{HfSi}_2\text{O}_6$ , was deposited with uniform thickness along the whole length of the heated zone. The thickness was about 0.3

nm per cycle.

Example 5. CVD of Yttrium Silicate. Example 1 was repeated with tris(*tert*-butyl(trimethylsilyl)amido)yttrium in place of tetrakis(ethylmethyldamido)zirconium. Films of composition approximately  $Y_2Si_2O_7$  were formed. No carbon or nitrogen  
5 was detected in the film. The refractive indexes of films deposited on silicon were found to be about 1.6 by ellipsometry.

Example 6. ALD of Yttrium Silicate. Example 5 was repeated except that the precursors were injected in alternate pulses spaced 5 seconds apart, instead of continuously. A film of similar composition,  $Y_2Si_2O_7$ , was deposited with uniform  
10 thickness along the whole length of the heated zone. The thickness was about 0.3 nm per cycle. Composition approximately  $Y_2Si_2O_7$ .

Example 7. CVD of Lanthanum Silicate. Example 1 was repeated with tris(bis(trimethylsilyl)amido)lanthanum in place of tetrakis(ethylmethyldamido)zirconium and tetradecane in place of mesitylene. Films  
15 with a La:Si ratio of about 0.9 were formed on a glassy carbon substrate at a substrate temperature of 250 °C. No carbon or nitrogen was detected in the films.

Example 8. ALD of Lanthanum Silicate. Example 7 was repeated except that the precursors were injected in alternate pulses spaced 5 seconds apart, instead of continuously. A film of similar composition was deposited with uniform thickness  
20 along the whole length of the heated zone.

Example 9. CVD of Lithium Phosphate. Liquid lithium bis(ethyldimethylsilyl)amide (1 part by weight) was mixed with mesitylene (99 parts). The resulting solution was nebulized by pumping at a rate of 12 ml/hour into a tee joint into nitrogen gas flowing at 0.30 L/min into the deposition zone inside a  
25 tube (24 mm inside diameter) in a furnace heated to 250 °C. Simultaneously a 1%

mesitylene solution of diisopropylphosphate was similarly nebulized into another nitrogen carrier gas stream flowing at 0.30 L/min into the same tube furnace. The gas pressure was maintained at 5 Torr by a vacuum pump attached to the outlet of the glass tube by a liquid nitrogen trap. A thin film was deposited on a silicon  
5 substrate placed on the bottom of the glass tube, as well as on the inside of the tube. The thickness profile showed a peak near the gas entrance to the tube furnace. The film was analyzed by X-ray photoelectron spectroscopy to contain lithium, phosphorus and oxygen.

Example 10. ALD of Lithium Phosphate. Example 9 was repeated with the  
10 change that the materials were introduced in alternating pulses spaced 5 seconds apart in time. A similar lithium phosphate film was deposited, except that the thickness was nearly constant throughout the deposition zone.

Comparative Example 1. Control deposition with only tris(*tert*-  
butoxy)silanol. Example 1 was repeated using only the silicon precursor and no  
15 zirconium precursor. No film was deposited.

Comparative Example 2. Control deposition with only  
tetrakis(ethylmethyamido) zirconium. Example 1 was repeated using only the  
zirconium precursor and no silicon precursor. No film was deposited.

Comparative Example 3. Control deposition with only  
20 tetrakis(ethylmethyamido) hafnium. Example 3 was repeated using only the  
hafnium precursor and no silicon precursor. No film was deposited.

Comparative Example 4. Control deposition with only tris(*tert*-butyl  
(trimethylsilyl)amido)yttrium. Example 5 was repeated using only the yttrium  
precursor and no silicon precursor. No film was deposited.

25 Comparative Example 5. Control deposition with only



tris(bis(trimethylsilyl)amido) lanthanum. Example 7 was repeated using only the lanthanum precursor and no silicon precursor. No film was deposited.

Comparative Example 6. Control deposition with only diisopropylphosphate.

Example 9 was repeated using only the phosphorus precursor and no lithium  
5 precursor. No film was deposited.

Comparative Example 7. Control deposition with only lithium

bis(ethyldimethylsilyl) amide. Example 9 was repeated using only the lithium precursor and no phosphorus precursor. No film was deposited.

Example 11. ADL formation of metal silicates and phosphates.

10 The ALD examples 2, 4, 6, 8 and 10 were repeated using automobile fuel injectors (Ford model CM-4722 F13Z-9F593-A) to deliver pulses of the solutions of precursors into the nitrogen carrier gas. About 0.05 m of solution was delivered each time that a valve was opened for about 50 milliseconds. Similar results were obtained.

15 The ALD examples 2, 4, 6, 8 and 10 were repeated using a 6-port sampling valves (Valco model EP4C6WEPH, Valco Instruments, Houston, TX) normally used for injecting samples into gas chromatographs to deliver pulses of tetradecane solutions into the nitrogen carrier gas. External sample loops having volumes of 50 microliters were used. Each time that a valve was opened, about 50 microliters of  
20 solution flowed into a 1/16" O. D., 0.040" I. D. nickel tube in which the solution was vaporized by heat from hot oil flowing over the outside of the tube. Nitrogen carrier gas moved the vapor from the small tube into the ALD reactor tube. Similar results were obtained.

In another series of examples, pulses of those precursors that are liquids at  
25 room temperature were delivered for ALD experiments similar to examples 2, 4, 6, 8

and 10 using 4-port sampling valves with small (0.5 microliter) internal sampling loops (Valco model EH2CI4WE.5PH, Valco Instruments, Houston, TX). Each time that a valve was opened, about 0.5 microliters of liquid flowed into a 1/16" O. D., 0.040" I. D. nickel tube in which the liquid was vaporized by heat from hot oil  
5 flowing over the outside of the tube. Nitrogen carrier gas moved the vapor from the small tube into the ALD reactor tube. Similar results were obtained.

Example 12. ALD of Hafnium Oxide. A hafnium oxide layer was deposited using the apparatus of FIG. 1. Doses of  $0.5 \times 10^{-9}$  moles/cm<sup>2</sup> of tetrakis(dimethylamido)hafnium vapor and  $4 \times 10^{-9}$  moles/cm<sup>2</sup> of water vapor were  
10 injected alternately every 5 seconds into a deposition chamber held at 250 °C. The chamber was also fed a continuous flow of nitrogen carrier gas sufficient to maintain a pressure of 0.15 Torr. The deposition chamber had a cross-sectional area of 2.3 square centimeters in the plane perpendicular to the direction of gas flow through the chamber. The outlet of the deposition chamber was attached to a vacuum pump with  
15 capacity (195 liters/minute) sufficient to pump a volume equal to the deposition chamber in about 0.012 seconds.

As a result of these reaction conditions, a transparent, electrically insulating hafnium oxide film was deposited on substrates in the deposition chamber and onto its inner walls. Its composition was determined to be HfO<sub>2</sub> by Rutherford  
20 backscattering spectroscopy (RBS) of a film on a glassy carbon substrate. No carbon or nitrogen was detected (<1 atomic per cent). By ellipsometry, its thickness was determined to be 0.1 nanometer/cycle and its refractive index 2.05. Combining data from RBS and ellipsometry yielded a density of about 9. The thickness was constant over the whole deposition region, to within the estimated measurement error of  
25 about 1 %. Small-angle X-ray reflectivity measurements confirmed the thickness

and gave a density of  $9.23 \text{ g/cm}^3$ . X-ray reflectivity also showed that the films are very smooth, with root mean square surface roughness about 0.4 nm for a film 43 nm thick. Scanning electron microscopy showed that films grown at  $150^\circ\text{C}$  are even smoother than the ones grown at  $250^\circ\text{C}$ .

5            Repeating Example 12 with higher doses of either reactant did not increase the film thickness or change its properties. These results show that the surface reactions are self-limiting. This conclusion was confirmed by placing inside the deposition chamber 110 a quartz crystal micro-balance (not shown), which showed that the amount of mass deposited first increased and then reached a plateau as the  
10   size of each dose was increased. As a result of these self-limiting surface reactions, uniform films could be deposited inside holes with ratios of length to diameter over 50. Uniformity of thickness inside these holes was improved by increasing the dose to 10 times the minimum required for saturation of the reactions on a flat surface without the holes. Reducing the capacity (speed) of the vacuum pump also helps to  
15   improve the step coverage by reducing the linear velocity of the vapors through the deposition chamber, thereby increasing the time during which the vapors can diffuse down the holes, i.e. increasing the flux (Langmuirs of exposure). FIG. 3 shows a scanning micrograph of holes coated with hafnium oxide, cleaved to reveal their highly uniform thickness. The hafnium oxide layer is the bright line outlining each  
20   of the narrow vertical holes in the silicon, which appears as a dark background. At the top of the micrograph is the upper surface of the silicon from which the holes were etched prior to the deposition of the hafnium oxide.

Repeating Example 12 with substrate temperatures in the range from  $100^\circ\text{C}$  to  $300^\circ\text{C}$  gave similar results. At temperatures above  $300^\circ\text{C}$ , the thickness  
25   increased with increasing the dose of tetrakis(dimethylamido)hafnium. This shows

that the surface reaction is not self-limiting at temperatures above 300 °C, due to thermal decomposition of tetrakis(dimethylamido)hafnium.

Example 13. ALD of Zirconium Oxide. Example 12 was repeated with tetrakis(dimethylamido)zirconium in place of tetrakis(dimethylamido)hafnium.

5 Films of zirconium dioxide with similar properties were deposited.

Example 14. ALD of Hafnium Oxide. Example 12 was repeated with *tert*-butanol vapor in place of water vapor. Films of hafnium dioxide with similar properties were deposited.

Example 15. ALD of Tantalum Oxide. Example 12 was repeated with  
10 ethylimidotris(diethylamido)tantalum vapor in place of  
tetrakis(dimethylamido)hafnium vapor. Transparent films of Ta<sub>2</sub>O<sub>5</sub> were deposited.  
They have a refractive index of 2.2, and a thickness of about 0.06 nm per cycle.

Example 16. ALD of Aluminum Phosphate. ALD was carried out using  
alternating doses of  $3 \times 10^{-9}$  moles/cm<sup>2</sup> of the vapors of trimethylaluminum and  
15 diisopropylphosphate at a substrate temperature of 400 °C. Transparent aluminum  
phosphate films with approximate composition Al<sub>2</sub>P<sub>4</sub>O<sub>13</sub> were deposited at a rate of  
0.1 nm per cycle. They had a refractive index of about 1.5.

Example 17. ALD of Aluminum Silicate. ALD was carried out using  
alternating doses of  $3 \times 10^{-9}$  moles/cm<sup>2</sup> of trimethylaluminum vapor and  $1.2 \times 10^{-8}$   
20 moles/cm<sup>2</sup> of tris(*tert*-butoxy)silanol vapor at a substrate temperature of 300 °C.  
Transparent aluminum silicate films with approximate composition Al<sub>2</sub>Si<sub>8</sub>O<sub>19</sub> were  
deposited at a remarkably high rate of 1 nm per cycle. They had a refractive index of  
about 1.48. The surfaces of the films are very smooth; atomic force microscopy  
determined a root mean square roughness of less than 0.8 nm for an aluminum  
25 silicate film 150 nm thick. The tensile stress in a film 2 micrometers thick on a

silica substrate was measured to be about 0.2 giga-Pascals. A similar film deposited on single-crystalline silicon showed a smaller tensile stress of 0.03 giga-Pascals. A film 6 microns thick showed cracks and delamination because of the tensile stress.

This tensile stress can be reduced, eliminated, or even reversed to compressive stress by plasma treatment. The deposition is temporarily halted after a thin layer (such as 5 to 10 nm) has been deposited, a radio-frequency plasma (in a low-pressure gas such as O<sub>2</sub> + argon) is applied, and then the plasma power is stopped and the deposition is resumed. Multiple cycles of deposition and plasma treatment may be used to build up thicker layers with tensile or compressive stress values adjusted to the requirements of particular applications, particularly those requiring thicker films.

Example 18. ALD of Aluminum Silicate. ALD was carried out using alternating doses of  $3 \times 10^{-9}$  moles/cm<sup>2</sup> of trimethylaluminum vapor and  $3 \times 10^{-8}$  moles/cm<sup>2</sup> of tris(*tert*-butoxy)silanol vapor at a substrate temperature 200 °C. Transparent aluminum silicate films with approximate composition Al<sub>2</sub>Si<sub>16</sub>O<sub>35</sub> were deposited at a remarkably high rate of 2 nm per cycle. They had a refractive index of about 1.47.

Example 19. ALD of Aluminum Silicate. ALD was carried out with alternating doses of  $3 \times 10^{-9}$  moles/cm<sup>2</sup> of tris(dimethylamino)aluminum vapor and  $3 \times 10^{-8}$  moles/cm<sup>2</sup> of tris(*tert*-butoxy)silanol vapor at a substrate temperature 250 °C. An aluminum silicate film was formed with thickness 0.1 nm/cycle and a refractive index of about 1.46.

Example 20. ALD of Aluminum Silicate. Example 19 was repeated with tris(*tert*-pentyloxy)silanol vapor in place of the tris(*tert*-butoxy)silanol vapor. Similar results were obtained.

Example 21. ALD of Aluminum Silicate. Example 19 was repeated with a dose of water vapor between the doses of tris(dimethylamino)aluminum vapor and tris(*tert*-butoxy)silanol vapor. A similar film was obtained with very uniform thickness of 0.1 nm/cycle ( $\pm 1\%$ ) along the direction of gas flow.

5        Example 22. ALD of Lanthanum silicate. Example 12 was repeated with tris(bis(trimethylsilyl)amido)lanthanum vapor in place of tetrakis(dimethylamido)hafnium vapor and with the apparatus of FIG. 2, used as described herein above. Transparent oxide films with a La:Si ratio of about 2 were formed on substrates at a substrate temperature of 250 °C. No carbon or nitrogen  
10       was detected in the films. They have a refractive index of 1.7, and a thickness of about 0.1 nm per cycle.

Example 23. ALD of Lanthanum oxide. ALD can be carried out with alternating doses of tris(2,2,6,6-tetramethylpiperidido)lanthanum vapor using the apparatus of FIG. 2 and water vapor to form lanthanum oxide films.

15       Example 24. ALD of Silicon dioxide. ALD can be carried out with alternating doses of tetrakisocyanatosilane vapor and tris(*tert*-butoxy)silanol vapor to form silicon dioxide films. Larger fluxes of exposure ( $> 10^{-7}$  Langmuirs) are required for these less reactive precursors.

20       Those skilled in the art will recognize or be able to ascertain using no more than routine experimentation, many equivalents to the specific embodiments of the invention described specifically herein. Such equivalents are intended to be encompassed in the scope of the following claims.

What is claimed is:

1. A process for forming materials comprising silicon, oxygen and one or more metals or metalloids, comprising:


reacting the vapor of one of an alkoxysilanol and an alkoxysilanediol  
 5 together with a vapor of one or more of a metal compound and a metalloid compound.

2. A process for forming materials comprising silicon, oxygen and one or more metals or metalloids, comprising:

10 exposing a substrate alternately to the vapor of one or an alkoxysilanol and an alkoxysilanediol and the vapor of one or more of a metal compound or a metalloid compound to form a film on the substrate.

3. The process of claim 1, wherein compound is deposited as a film on a  
 15 substrate.

4. The process as in claims 1 or 2, wherein the silanol has the formula

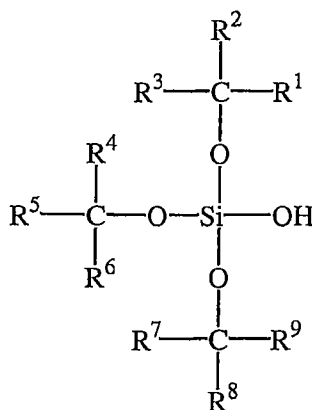


20 where the  $\text{R}^n$  represents hydrogen, alkyl groups, fluoroalkyl groups or alkyl groups

substituted by other atoms or groups,  $R^n$  being any one of the groups  $R^1$  through  $R^9$ ,  
and where  $R^n$  are the same or different.

5. The process of claim 4, wherein the groups  $R^n$  contain between one  
5 and four carbons and are the same or different.

6. The process of claim 5, wherein the groups  $R^n$  are all methyl groups.

10 7. The process of claim 5, wherein  $R^1$ ,  $R^4$  and  $R^7$  are ethyl groups and  
 $R^2$ ,  $R^3$ ,  $R^5$ ,  $R^6$ ,  $R^8$  and  $R^9$  are methyl groups and the silanol has the formula

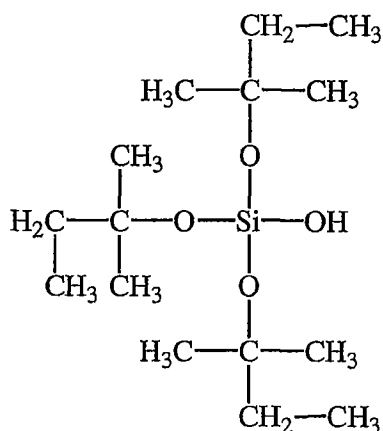

8. The process of claims 1 or 2, wherein a metal or metalloid compound  
15 contains metal-nitrogen or metalloid-nitrogen bonds.

9. The process of claim 8, wherein a metal or metalloid compound is  
selected from Table 1.

20

10. The process of claim 1 or 2, wherein a metal compound is selected



from Table 2.

11. The process of claim 1 or 2, wherein a metal or metalloid compound is selected from Table 3.

5

12. A process for forming materials comprising phosphorus, oxygen and one or more metals or metalloids, comprising:

reacting a vapor of a bis(alkyl)phosphate with a vapor of one or more of a metal compound and a metalloid compound.

10

13. A process for forming materials comprising phosphorus, oxygen and one or more metals or metalloids, comprising:


exposing a substrate alternately to a vapor of a bis(alkyl)phosphate and a vapor of one or more of a metal compound and metalloid compound to form a film on the substrate.

15

14. The process of claim 12, wherein the material comprising phosphorus, oxygen and one or more metals or metalloids is deposited as a film on a substrate.

20

15. The process as in claim 12 or 13, wherein the bis(alkyl)phosphate has the formula

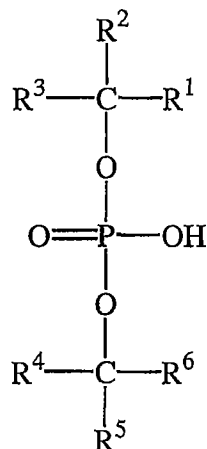


where the  $R^n$  represents hydrogen, alkyl groups, fluoroalkyl groups or alkyl groups substituted by other atoms or groups,  $R^n$  being any one of the groups  $R^1$  through  $R^6$ , and wherein  $R^n$  are the same or different.

5

16. The process of claim 15, wherein the groups  $R^n$  contain between one and four carbons and may be the same or different.

17. The process of claim 16, wherein the groups  $R^1$ ,  $R^3$ ,  $R^4$  and  $R^6$  are  
 10 methyl groups, the groups  $R^2$  and  $R^5$  are hydrogen, and the compound has the formula

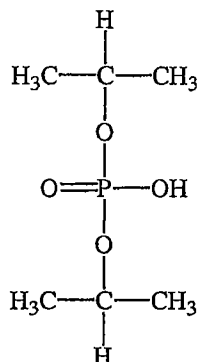

15 18. The process of claims 12 or 13, wherein a metal or metalloid compound contains metal-nitrogen or metalloid-nitrogen bonds.


19. The process of claim 18, wherein a metal or metalloid compound is chosen from Table 1.

20. The process of claim 12 or 13, wherein a metal compound is chosen  
5 from Table 2.

21. The process of claims 13 or 14, wherein a metal or metalloid compound is selected from Table 3.

10 22. A process for forming a material comprising silicon, comprising:  
exposing a substrate to one or more vapors chosen from the group consisting of alkoxysilanols, alkoxysilanedioles and silylenes.

23. The process of claim 22, wherein the silylene is the compound  
15 described by the formula



wherein R is an alkyl group.

24. The process of claim 23, wherein R is *tert*-butyl.

20 25. A process for forming a material comprising phosphorus, comprising:  
exposing a substrate to one or more vapors selected from the group  
consisting of bis(alkyl)phosphates, phosphorus(III) oxide and white phosphorus.

26. A process for forming a material comprising oxygen, comprising:  
exposing a substrate to one or more vapors chosen from the group consisting  
of arene hydrates.

5

27. The process of claim 26, wherein the arene hydrate is benzene  
hydrate, a naphthalene hydrate, a substituted benzene hydrate or a substituted  
naphthalene hydrate.

10

28. A process for forming a metal oxide, comprising:  
exposing a heated surface alternately to the vapor of one or more metal  
amides and then to the vapors of water or an alcohol.

15

29. A process as in claim 28, wherein the alcohol is an arene hydrate.

30. A process as in claim 28, wherein the metal amide or amides are  
chosen from Table 1.

20

31. A process for forming material comprising oxygen and one or more  
metals, comprising:  
exposing a surface alternately to the vapor of one or more organometallic  
compounds and then to the vapors of an arene hydrate.

25

32. A process as in claim 31, wherein the organometallic compounds are  
chosen from Table 2.

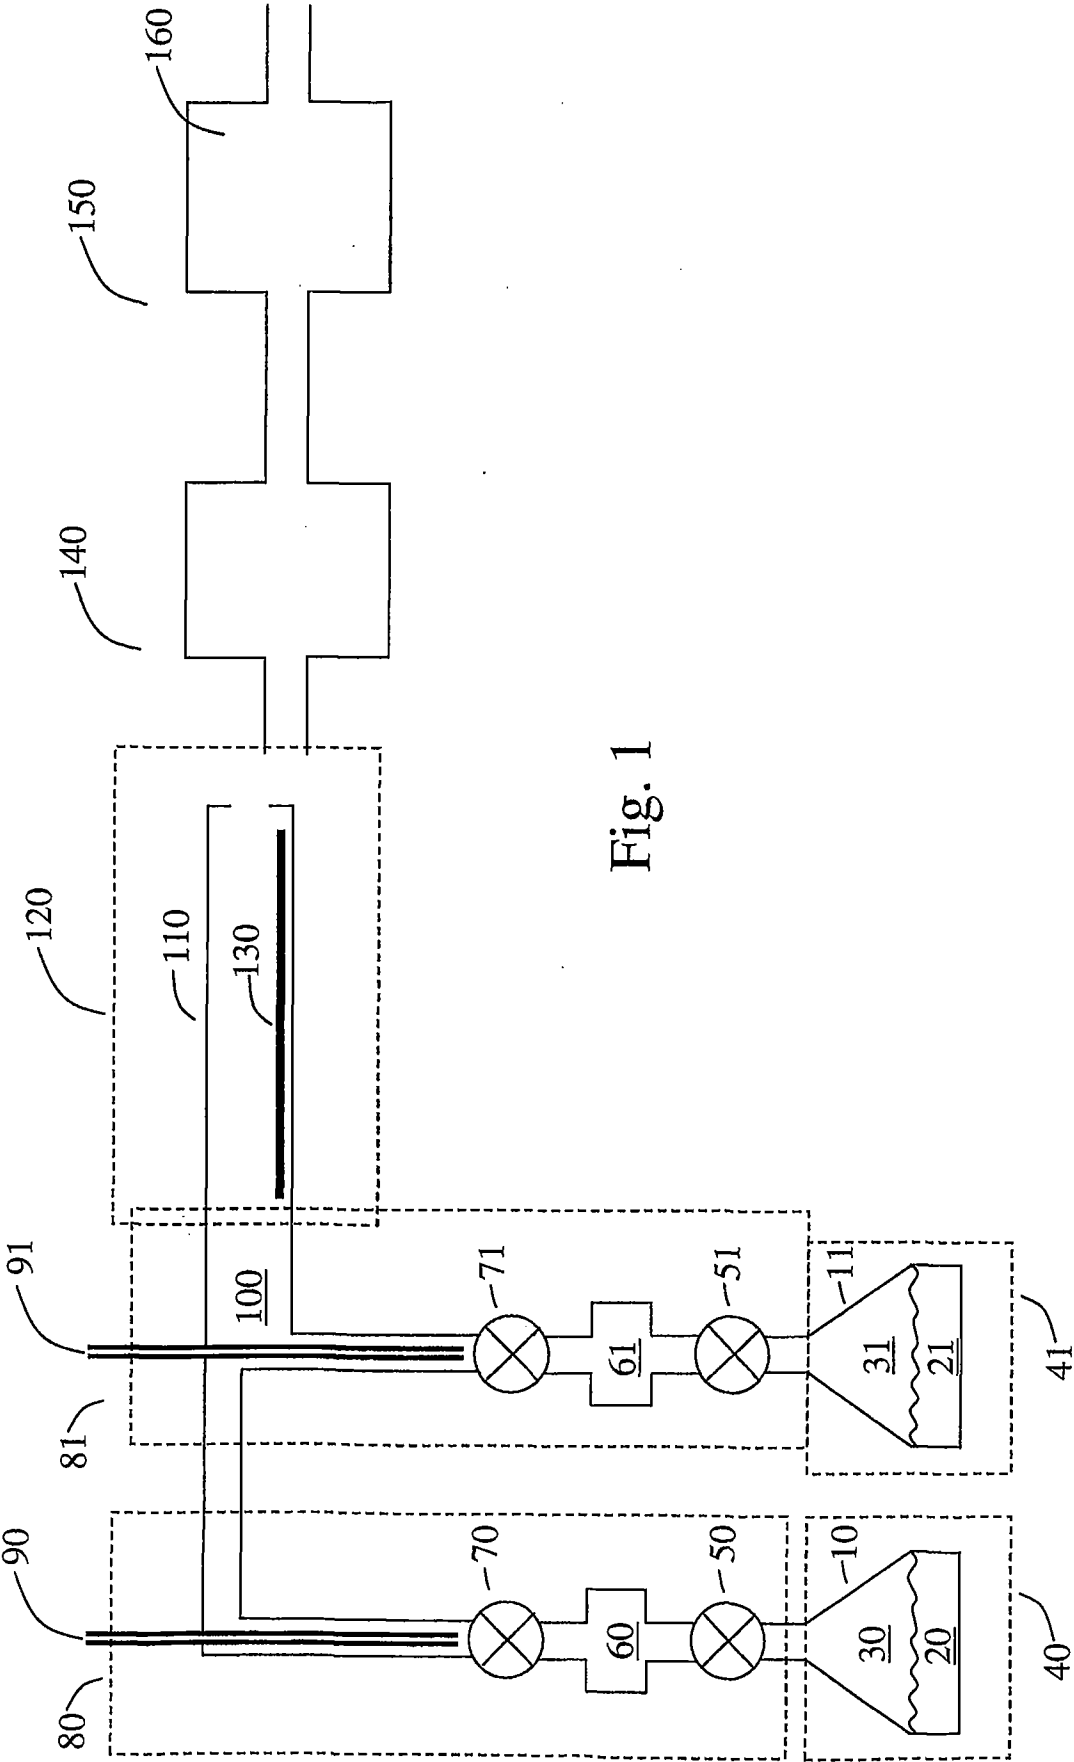


Fig. 1

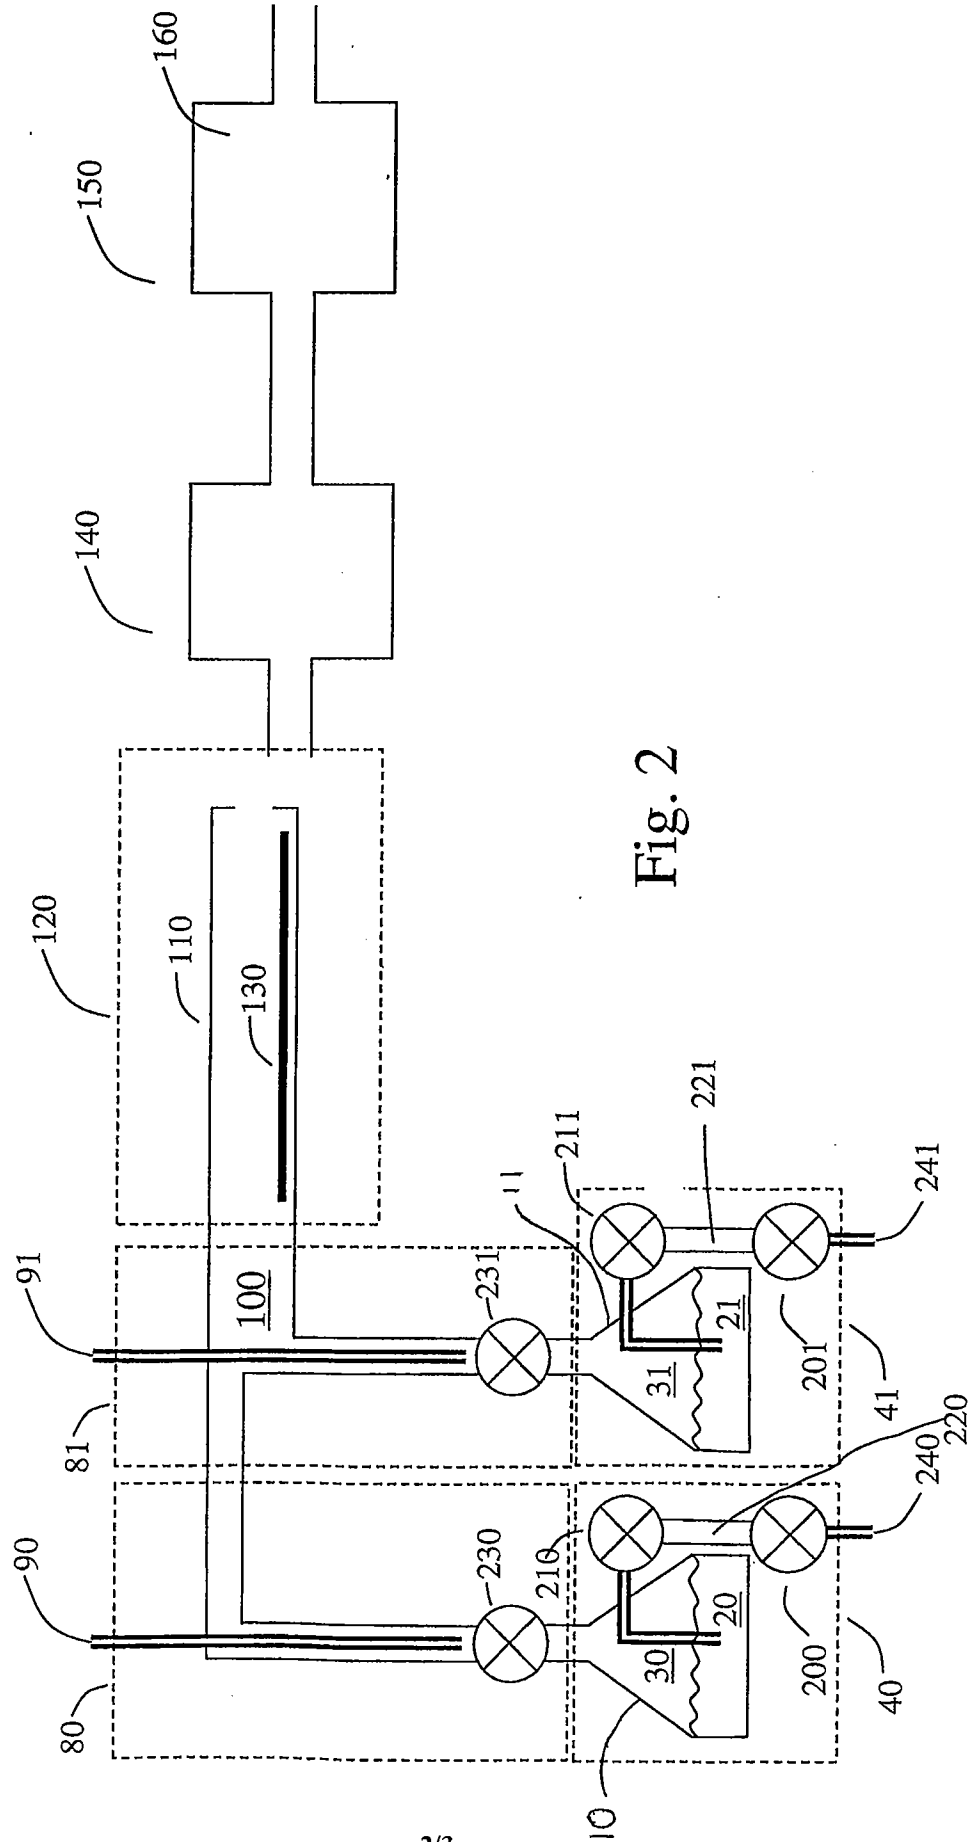


Fig. 2